

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH82761-LC

効 率	F 	3 %
	F 	97 %
	F 	100 %
	器具 光束	4550 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

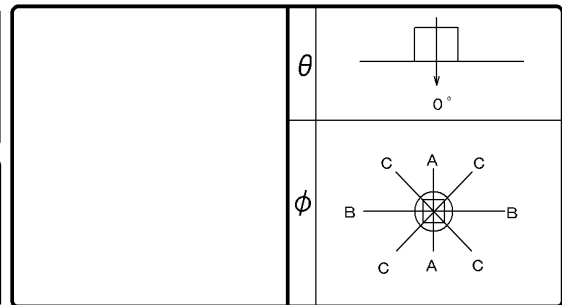

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30		20	0	
θ \ φ	A-A	B-B	C-C			70						50						30						10	0			
						70						50						30						10	0			
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
				室指数	固 有 照 明 率 (×0.01)																							
0°	313	313	313	0.60	61	56	46	44	38	37	59	55	46	43	37	36	44	42	36	35	35	35	30	28				
10°	308	308	308	0.80	73	66	58	55	49	47	70	65	57	54	48	46	55	52	47	46	46	45	40	38				
20°	294	294	294	1.00	80	72	66	61	56	53	77	70	64	60	55	53	61	58	54	52	52	51	46	43				
30°	270	270	270	1.25	88	78	74	68	65	61	85	76	72	67	63	60	69	65	61	58	59	57	52	50				
40°	238	238	238	1.50	93	82	80	73	71	66	89	80	78	71	69	65	74	69	66	63	64	62	57	55				
50°	198	198	198	2.00	101	88	90	81	81	74	97	86	87	79	79	73	82	77	76	72	72	70	65	63				
60°	151	151	151	2.50	106	92	96	85	88	79	102	90	93	84	86	78	87	81	82	76	78	74	70	68				
70°	101	101	101	3.00	110	94	101	88	93	83	105	92	98	87	91	82	91	84	86	80	82	78	74	72				
80°	51	51	51	4.00	115	97	107	93	101	89	110	96	104	91	98	88	97	89	92	85	87	83	80	77				
90°	12	12	12	5.00	117	99	111	96	106	92	113	98	107	94	102	91	100	91	96	88	91	86	83	80				
100°	3	3	3	10.00	124	103	120	101	117	99	119	102	116	100	113	98	107	97	105	95	98	93	90	88				
110°	4	4	4																									
120°	4	4	4																									
130°	5	5	5																									
140°	6	6	6																									
150°	7	7	7																									
160°	7	7	7																									
170°	6	6	6																									
180°	0	0	0																									

