

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH84155-LC

効 率	F 	7 %
	F 	93 %
	F 	100 %
	器具 光束	4320 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（乳白）
反射面	塗装（白）

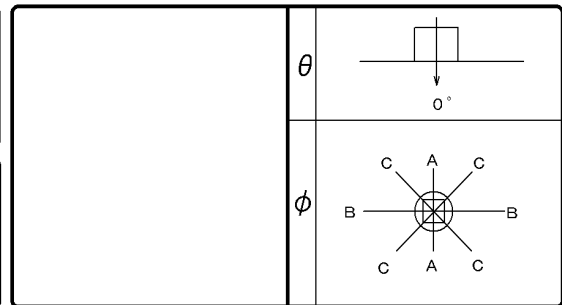

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10	0				
						70		50		30		70		50		30		50		30		30		10	0				
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
0°	308	308	308		室指数	固 有 照 明 率 (×0.01)																							
10°	302	302	302		0.60	60	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	34	34	29	27				
20°	285	285	285		0.80	72	65	58	54	48	46	69	64	56	53	47	46	53	51	46	44	44	43	38	36				
30°	257	257	257		1.00	79	71	65	60	55	52	76	69	63	59	54	52	60	57	52	50	50	49	44	41				
40°	222	222	222		1.25	87	77	73	67	63	59	83	75	71	66	62	58	67	63	59	57	57	55	50	47				
50°	182	182	182		1.50	92	81	79	71	69	64	88	79	76	70	68	63	72	67	64	61	61	59	55	52				
60°	139	139	139		2.00	100	87	89	79	80	73	96	85	85	77	77	71	80	74	73	69	70	67	62	59				
70°	96	96	96		2.50	105	90	94	83	86	78	100	88	91	82	84	76	85	78	79	74	74	71	67	64				
80°	58	58	58		3.00	108	93	99	87	91	82	103	91	95	85	89	80	89	82	83	77	78	75	71	68				
90°	31	31	31		4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	89	82	84	80	76	73				
100°	17	17	17		5.00	116	98	109	94	104	90	111	96	105	92	100	89	97	88	93	86	87	83	79	76				
110°	11	11	11		10.00	122	102	118	100	115	98	117	100	113	98	110	96	104	94	102	92	94	89	86	83				
120°	8	8	8																										
130°	6	6	6																										
140°	6	6	6																										
150°	6	6	6																										
160°	6	6	6																										
170°	5	5	5																										
180°	0	0	0																										

