

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH84510-LC

効 率	F 	11 %
	F 	89 %
	F 	100 %
	器具 光束	4380 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

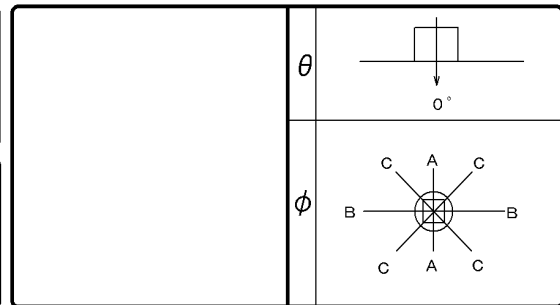

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50				30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70		50		30		50	30	30	10	0			
	0°	277	277		277	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
		10°	272		272																					272	30	10
20°	260	260	260	室指数	固有照明率 (×0.01)																							
30°	239	239	239	0.60	59	54	45	42	36	35	57	52	43	41	35	34	41	39	34	33	32	32	27	25				
40°	210	210	210	0.80	71	64	56	53	47	45	68	62	54	51	46	44	51	49	44	42	42	41	36	33				
50°	174	174	174	1.00	78	70	63	59	54	51	74	67	61	57	52	50	57	54	50	48	47	46	41	38				
60°	133	133	133	1.25	85	76	71	66	62	58	81	73	69	64	60	57	64	61	57	54	54	52	47	44				
70°	94	94	94	1.50	90	79	77	70	68	63	86	77	74	68	66	61	69	65	62	59	58	57	52	48				
80°	60	60	60	2.00	98	86	87	78	78	71	94	83	84	76	75	70	77	72	71	67	66	64	59	56				
90°	36	36	36	2.50	103	89	93	82	84	76	98	86	89	80	82	74	82	76	76	71	71	68	64	60				
100°	21	21	21	3.00	107	91	97	85	90	80	102	89	93	83	86	78	86	79	80	75	75	72	67	64				
110°	15	15	15	4.00	111	95	104	90	97	85	106	92	99	88	93	83	91	83	86	80	80	76	72	68				
120°	15	15	15	5.00	114	97	108	93	102	89	109	94	103	90	98	87	94	86	90	83	83	79	75	72				
130°	16	16	16	10.00	121	101	117	98	113	96	115	98	111	96	108	94	101	92	99	90	91	86	83	79				
140°	16	16	16																									
150°	15	15	15																									
160°	14	14	14																									
170°	12	12	12																									
180°	0	0	0																									

