


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84608-LC

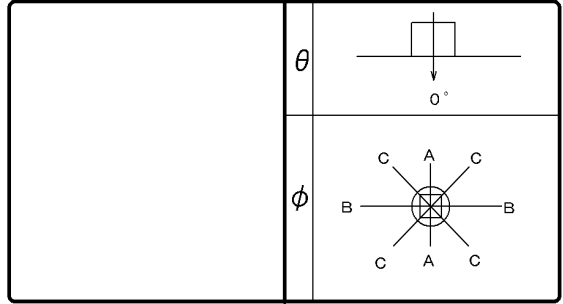

効 率	F $\frac{1}{2}$	10%
	F $\frac{3}{4}$	90%
	F $\bigcirc$	100%
	器具 光束	4170 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	304	304	304
10°	299	299	299
20°	284	284	284
30°	258	258	258
40°	221	221	221
50°	178	178	178
60°	132	132	132
70°	86	86	86
80°	48	48	48
90°	25	25	25
100°	15	15	15
110°	15	15	15
120°	16	16	16
130°	16	16	16
140°	17	17	17
150°	17	17	17
160°	16	16	16
170°	14	14	14
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20		0					
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	60	56	46	44	38	37	58	54	45	43	37	36	43	41	36	35	34	34	29	27
0.80	72	66	58	54	49	47	69	64	56	53	48	46	53	51	46	45	44	43	38	36
1.00	79	71	65	61	56	53	76	69	63	59	55	52	60	56	52	50	50	49	44	41
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	59	57	56	55	50	47
1.50	92	81	79	72	70	65	88	78	76	70	68	64	71	67	64	61	61	59	54	51
2.00	100	87	89	79	80	73	95	84	86	77	78	72	79	74	73	69	69	66	62	58
2.50	104	90	95	84	87	78	100	88	91	82	84	76	84	78	78	73	74	71	66	63
3.00	108	93	99	87	92	82	103	90	95	85	89	80	88	81	83	77	77	74	70	66
4.00	113	96	105	91	99	87	107	93	101	89	95	85	93	85	89	82	82	78	75	71
5.00	115	98	109	94	104	90	110	95	105	92	100	88	96	87	92	85	85	81	78	74
10.00	121	102	118	99	115	97	116	99	113	97	110	95	103	93	101	91	93	87	84	81

