

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH84613-LC

効 率	F 	13%
	F 	87%
	F 	100%
	器具光束	4380 lm

保守率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

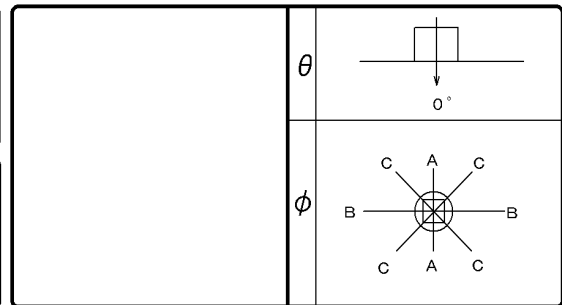

備 考	
--------	--

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10	0			
					床	70		50		30		70		50		30		50		30		30		10	0			
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数				固有照明率 (×0.01)																								
0°	282	282	282	0.60	59	55	45	43	37	35	57	53	44	42	36	35	41	40	34	33	33	32	28	25				
10°	278	278	278	0.80	71	65	57	53	47	45	68	62	55	52	46	45	52	49	44	43	42	41	36	34				
20°	264	264	264	1.00	78	70	64	59	54	52	75	68	62	58	53	51	58	55	50	49	48	47	42	39				
30°	242	242	242	1.25	86	76	72	66	62	59	82	73	70	64	61	57	65	61	57	55	54	53	48	44				
40°	210	210	210	1.50	91	80	78	71	68	63	86	77	75	69	66	62	69	65	62	59	59	57	52	49				
50°	173	173	173	2.00	99	86	87	78	79	72	94	83	84	76	76	70	78	72	71	67	67	64	59	56				
60°	131	131	131	2.50	103	89	93	82	85	77	98	86	89	80	82	75	82	76	76	72	71	68	64	60				
70°	89	89	89	3.00	107	92	98	86	90	81	102	89	94	84	87	79	86	79	81	75	75	72	67	64				
80°	53	53	53	4.00	112	95	104	90	98	86	106	92	100	88	94	84	91	83	87	80	80	76	72	68				
90°	29	29	29	5.00	115	97	108	93	102	89	109	94	103	90	98	87	94	86	90	83	83	79	75	71				
100°	18	18	18	10.00	121	101	117	99	114	96	115	98	111	96	108	94	101	91	99	90	90	85	82	78				
110°	18	18	18																									
120°	20	20	20																									
130°	21	21	21																									
140°	21	21	21																									
150°	22	22	22																									
160°	20	20	20																									
170°	17	17	17																									
180°	0	0	0																									

