


東芝照明器具配光データシート

名称	東芝LED器具
形名	LEDR-168851LK-LD9

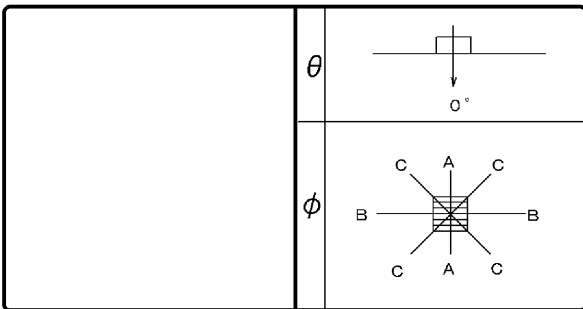

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F \bigcirc	100 %
	器具 光束	6210 lm

保守 率	良	0.77
	中	0.72
	否	0.68

前面	カバー (乳白)
反射面	

最大取付間隔	
A-A	1.18 H
B-B	1.18 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	458	458	458
10°	451	453	453
20°	422	423	432
30°	363	366	379
40°	279	283	295
50°	181	180	198
60°	108	105	104
70°	56	57	37
80°	26	25	24
90°	0	0	4
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
	室指数	固有照明率 (×0.01)																							
	0.60	69	63	56	53	48	46	67	62	55	52	47	46	53	51	47	46	46	45	41	41	40			
	0.80	81	74	69	64	60	58	79	73	67	64	60	58	65	62	59	57	58	56	52	51				
	1.00	88	79	76	70	67	64	86	78	74	69	66	63	72	68	65	63	64	62	58	56				
	1.25	95	85	84	77	75	70	92	83	82	76	74	70	79	74	72	69	70	68	64	63				
	1.50	100	88	89	81	81	75	97	87	87	80	80	75	83	78	77	74	75	72	69	67				
	2.00	107	93	98	87	90	83	104	92	95	86	89	82	91	85	86	81	83	79	76	74				
	2.50	111	96	103	91	96	87	108	95	100	90	94	86	95	88	90	85	87	83	80	78				
	3.00	114	98	107	94	101	90	111	97	104	93	99	89	99	91	94	88	90	86	83	82				
	4.00	118	101	112	97	107	94	114	99	109	96	104	93	103	94	99	92	95	90	88	86				
	5.00	121	102	116	99	111	97	116	101	112	98	108	96	105	96	102	94	97	92	90	88				
	10.00	126	105	123	104	120	102	121	104	119	102	116	101	111	100	109	99	103	97	95	93				

