


■ 東芝ランプ 配光データシート

名 称	LEDユニットフラット形 防水形	良	1.00
形 名	LDF6L-H-GX53/W	中	1.00
光 束	410 lm × 1	否	1.00

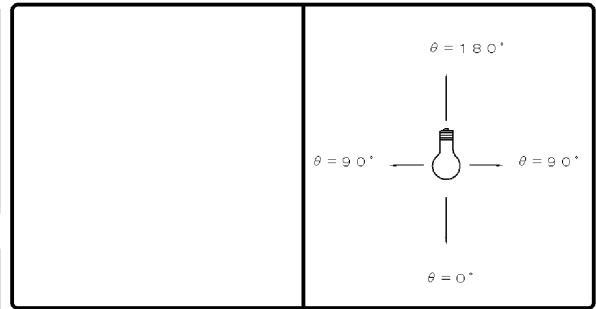

効 率	F		%
	F		%
	F	100	%
	器具 光束	410	lm

最大取付間隔	
A-A	1.23 H
B-B	1.23 H

備 考	データは初期の標準値です。
--------	---------------

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	376		
10°	369		
20°	345		
30°	306		
40°	255		
50°	198		
60°	140		
70°	85		
80°	35		
90°	5		
100°	5		
110°	4		
120°	3		
130°	3		
140°	2		
150°	2		
160°	1		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		64	59	50	48	42	40	62	58	49	47	41	40	48	46	40	39	40	39	34	33		
0.80		76	69	62	59	53	51	74	68	61	58	53	51	59	56	52	50	50	49	45	43		
1.00		83	75	70	65	61	58	81	73	68	64	60	57	65	62	58	56	57	55	51	48		
1.25		91	81	78	72	69	65	88	79	76	71	68	64	73	69	66	63	64	62	57	55		
1.50		96	85	84	76	75	70	93	83	82	75	73	69	78	73	71	68	68	66	62	60		
2.00		104	91	94	84	85	78	100	89	91	82	83	77	86	80	80	75	77	74	70	68		
2.50		109	94	99	88	92	83	105	92	96	87	90	82	91	84	85	80	82	78	75	72		
3.00		112	96	104	91	97	86	108	94	101	90	94	85	95	87	90	84	86	82	78	76		
4.00		117	99	110	95	104	91	112	98	106	94	101	90	100	91	96	88	91	86	83	81		
5.00		119	101	114	98	109	94	115	99	110	96	105	93	103	94	99	91	94	89	86	84		
10.00		125	105	122	103	119	101	120	103	117	101	115	100	109	99	107	97	101	95	93	91		

