


東芝ランプ 配光データシート

名称	LEDユニットフラット形 防水形
形名	LDF6N-H-GX5 3/WR
光束	450 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

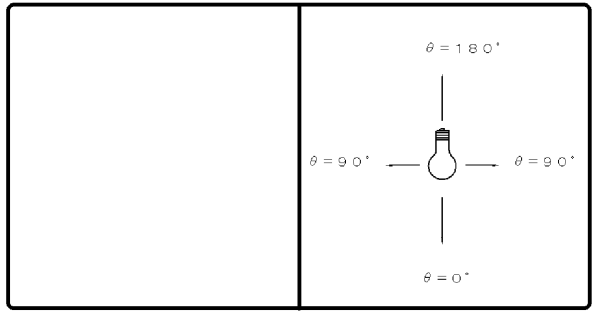

効率	F		%
	F		%
	F	100	%
	器具光束	450	lm

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	278		
10°	275		
20°	264		
30°	243		
40°	215		
50°	181		
60°	142		
70°	102		
80°	66		
90°	40		
100°	23		
110°	13		
120°	7		
130°	4		
140°	2		
150°	1		
160°	1		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照明率 (×0.01)																		
0.60	59	54	44	42	36	35	57	53	43	41	35	34	41	40	34	33	33	32	27	25
0.80	71	64	56	52	46	44	68	62	54	51	45	44	52	49	44	42	42	41	36	34
1.00	78	70	63	59	53	51	75	68	61	57	52	50	58	55	50	48	48	47	42	39
1.25	85	76	71	65	61	58	82	74	69	64	60	57	65	61	57	55	55	53	48	45
1.50	90	80	77	70	67	63	86	77	75	68	66	61	70	66	62	59	59	58	53	50
2.00	99	86	87	78	78	71	94	83	84	76	76	70	78	73	71	67	68	65	60	57
2.50	103	89	93	82	84	76	99	87	90	80	82	75	83	77	77	72	73	70	65	62
3.00	107	92	98	86	90	80	102	90	94	84	87	79	87	80	81	76	77	73	69	66
4.00	112	95	104	90	97	85	107	93	100	88	94	84	92	85	88	81	82	78	74	71
5.00	115	97	108	93	102	89	110	95	104	91	98	87	96	87	92	84	85	81	77	74
10.00	121	101	117	99	114	97	116	99	112	97	109	95	103	93	101	91	93	88	85	82

