


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82719X-LC

保守率	良	0.63
	中	0.60
	否	0.56

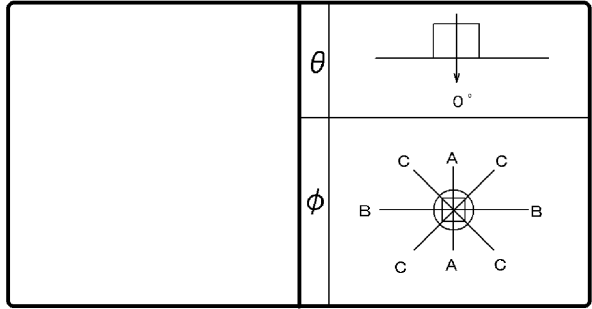

光源	名称	LED
	形名	LED
	光束	5000 lm x 1

効率	F	14%
	F	86%
	F	100%
	器具光束	5000 lm

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考	
----	--

前面	カバー (乳白)
反射面	塗装 (白)

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	279	279	279
10°	275	277	275
20°	259	260	259
30°	237	238	237
40°	208	210	208
50°	172	174	173
60°	132	134	133
70°	88	89	89
80°	48	49	49
90°	23	25	23
100°	16	18	17
110°	19	20	19
120°	22	23	22
130°	24	25	24
140°	25	25	25
150°	25	25	25
160°	24	24	24
170°	27	27	27
180°	27	28	28

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	50	30	30	10	10	0	0	
室指数	照明率 (x0.01)																			
0.60	57	53	43	41	34	33	55	51	41	39	33	32	39	37	31	31	30	29	25	22
0.80	68	61	53	50	44	42	65	59	51	48	42	41	48	46	40	39	38	37	32	29
1.00	77	69	62	58	52	50	73	66	60	56	51	49	56	53	48	46	45	44	39	36
1.25	84	75	70	64	60	57	80	72	68	63	59	55	63	59	55	53	52	50	45	42
1.50	90	79	77	70	67	62	85	76	74	68	65	61	68	64	61	58	57	55	50	47
2.00	98	85	86	77	77	71	93	82	83	75	75	69	76	71	70	66	65	63	58	54
2.50	103	89	93	82	84	76	98	86	89	80	81	74	81	75	75	71	70	67	62	59
3.00	106	91	97	85	90	80	101	88	93	83	86	78	85	78	80	74	74	71	66	62
4.00	111	94	104	90	97	85	105	92	99	87	93	83	90	82	86	79	79	75	71	67
5.00	114	96	108	92	102	89	108	94	103	90	98	87	93	85	90	82	82	78	74	70
10.00	120	101	117	98	113	96	114	98	111	96	108	94	101	91	98	89	90	85	81	77

