


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82710LC-LT4

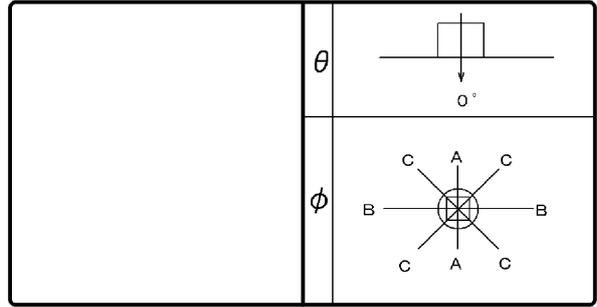

効 率	F $\frac{1}{2}$	11 %
	F $\frac{3}{4}$	89 %
	F \bigcirc	100 %
	器具 光束	4600 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	277	277	277
10°	272	272	272
20°	260	260	260
30°	239	239	239
40°	210	210	210
50°	174	174	174
60°	133	133	133
70°	94	94	94
80°	60	60	60
90°	36	36	36
100°	21	21	21
110°	15	15	15
120°	15	15	15
130°	16	16	16
140°	16	16	16
150°	15	15	15
160°	14	14	14
170°	12	12	12
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数		固有照明率 (×0.01)																						
0.60	59	54	45	42	36	35	57	52	43	41	35	34	41	39	34	33	32	32	27	25				
0.80	71	64	56	53	47	45	68	62	54	51	46	44	51	49	44	42	42	41	36	33				
1.00	78	70	63	59	54	51	74	67	61	57	52	50	57	54	50	48	47	46	41	38				
1.25	85	76	71	66	62	58	81	73	69	64	60	57	64	61	57	54	54	52	47	44				
1.50	90	79	77	70	68	63	86	77	74	68	66	61	69	65	62	59	58	57	52	48				
2.00	98	86	87	78	78	71	94	83	84	76	75	70	77	72	71	67	66	64	59	56				
2.50	103	89	93	82	84	76	98	86	89	80	82	74	82	76	76	71	71	68	64	60				
3.00	107	91	97	85	90	80	102	89	93	83	86	78	86	79	80	75	75	72	67	64				
4.00	111	95	104	90	97	85	106	92	99	88	93	83	91	83	86	80	80	76	72	68				
5.00	114	97	108	93	102	89	109	94	103	90	98	87	94	86	90	83	83	79	75	72				
10.00	121	101	117	98	113	96	115	98	111	96	108	94	101	92	99	90	91	86	83	79				

