


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-09323L-LD9

保守率	良	0.76
	中	0.72
	否	0.64

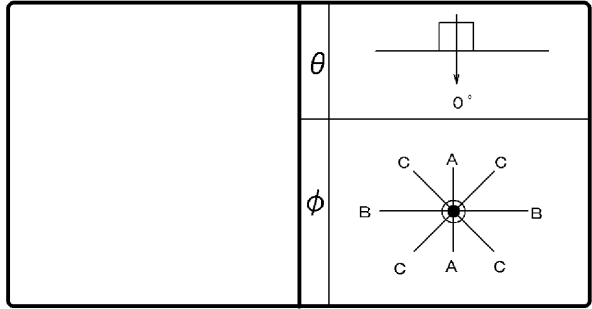

光源	名称	LED
	形名	3000K
	光束	1290 lm x 1

効率	F	0%
	F	100%
	F	100%
	器具光束	1290 lm

最大取付間隔	
A-A	0.52H
B-B	0.52H

備考	
----	--

前面	カバー (フロスト)
反射面	白色

0°	1742	25°	396
1°		30°	292
2°		35°	233
3°		40°	194
4°		45°	163
5°	1611	50°	133
6°		55°	101
7°		60°	64
8°		65°	35
9°		70°	14
10°	1281	75°	9
11°		80°	7
12°		85°	4
13°		90°	0
14°			
15°	896		
16°			
17°			
18°			
19°			
20°	587		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	10	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (x0.01)																			
0.60	77	71	66	62	59	57	75	70	65	62	58	57	63	61	58	56	57	56	53	51
0.80	87	79	75	71	68	65	85	78	74	70	68	65	73	69	67	65	66	64	61	59
1.00	95	85	84	78	76	73	92	84	82	77	76	72	80	76	74	71	73	71	68	66
1.25	100	89	90	82	83	78	97	88	88	82	82	77	85	80	80	76	78	75	72	71
1.50	104	92	95	86	88	82	101	91	93	85	86	81	89	84	84	80	82	79	76	75
2.00	110	96	102	91	95	87	107	95	100	90	94	86	95	88	90	85	87	84	81	80
2.50	114	98	107	94	101	91	110	97	104	93	99	90	99	91	95	89	91	87	85	83
3.00	117	100	110	96	105	93	113	99	107	95	102	93	102	94	98	91	94	90	87	86
4.00	120	102	115	99	110	97	116	101	112	98	108	96	105	97	102	95	98	93	91	89
5.00	122	103	118	101	114	99	118	102	114	100	111	99	108	98	105	97	100	95	93	92
10.00	127	106	125	105	123	104	122	105	121	104	119	103	113	102	112	101	105	100	98	96

