


東芝ランプ 配光データシート

名称	東芝LED電球
形名	LDA5L-G-K/40W
光束	485 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

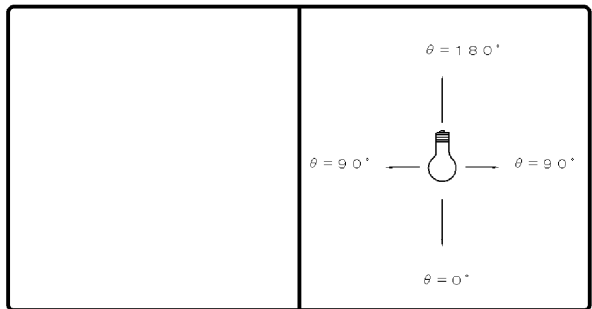

効率	F		%
	F		%
	F	100	%
	器具光束	485	lm

最大取付間隔	
A-A	1.37 H
B-B	1.37 H

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		137	
10°		133	
20°		130	
30°		126	
40°		121	
50°		115	
60°		107	
70°		99	
80°		90	
90°		80	
100°		70	
110°		60	
120°		50	
130°		41	
140°		33	
150°		26	
160°		20	
170°		0	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照明率 (×0.01)																		
0.60	51	47	37	35	28	27	47	44	34	33	26	26	30	29	24	23	21	21	16	13
0.80	61	55	46	43	36	35	57	52	43	41	35	33	38	36	31	30	27	27	21	18
1.00	68	61	53	49	43	41	63	57	50	46	40	39	43	41	36	35	32	31	25	21
1.25	75	66	60	55	50	47	69	62	56	52	47	45	49	47	42	40	37	36	30	25
1.50	79	70	66	60	55	51	74	66	61	56	52	49	54	50	46	44	41	39	33	28
2.00	87	76	75	67	65	59	81	72	70	63	61	57	61	57	54	51	47	46	39	34
2.50	92	79	81	71	72	64	85	75	75	68	67	61	65	60	59	55	52	49	43	37
3.00	96	82	86	75	77	69	89	78	80	71	72	65	69	64	63	59	55	53	46	40
4.00	101	86	92	80	84	74	93	81	86	76	79	71	74	68	69	64	60	57	51	44
5.00	104	88	96	83	89	78	96	83	90	78	84	74	77	70	73	67	63	60	54	47
10.00	111	93	106	90	102	87	103	88	99	85	95	82	85	77	82	75	71	67	62	54

