


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-60011MC-LC9

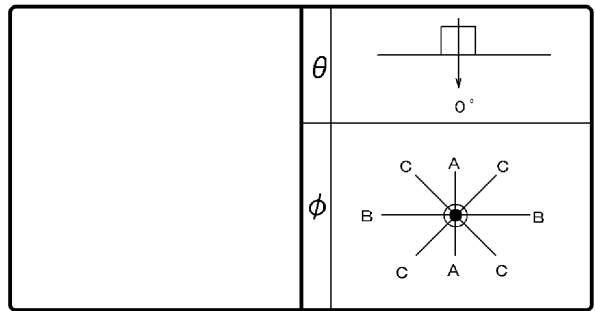

効 率	F ◡	0 %
	F ◒	100 %
	F ○	100 %
器具 光束		5040 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	1.09 H
B-B	1.09 H

備考	3600K-4400K時
----	--------------

θ	φ	光度 (cd/1000lm)		
		A-A	B-B	C-C
0°		673		
10°		640		
20°		571		
30°		484		
40°		318		
50°		118		
60°		49		
70°		11		
80°		2		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30			50	30	30	10	10	0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																		
0.60	78	72	66	63	59	58	76	71	66	63	59	57	64	62	58	57	58	57	53	52
0.80	90	82	80	75	73	70	88	81	79	74	72	69	77	73	71	69	70	68	65	64
1.00	96	86	86	80	79	75	94	85	84	79	78	74	82	78	76	74	75	73	70	69
1.25	102	91	92	85	86	80	100	90	91	84	84	80	88	83	82	79	81	78	75	74
1.50	106	94	97	88	90	84	103	92	95	87	89	84	92	86	87	83	84	82	79	77
2.00	112	98	105	94	99	90	109	97	102	93	97	89	98	91	94	88	91	87	85	83
2.50	116	100	109	96	103	93	112	99	106	95	101	92	101	94	97	91	94	90	88	86
3.00	118	101	112	98	107	95	114	100	109	97	105	95	104	95	100	93	96	92	90	88
4.00	121	103	116	101	112	99	117	102	113	100	109	98	107	98	104	96	99	95	93	91
5.00	123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	93
10.00	127	106	125	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	98	96

