


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH80129-LC

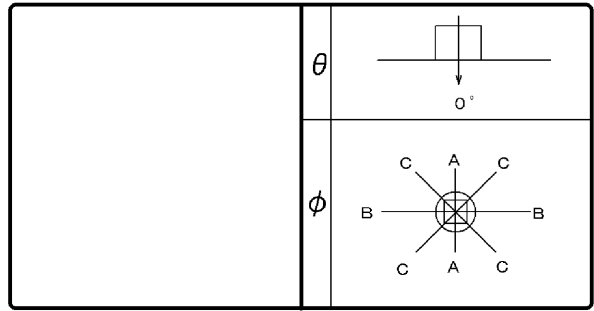

効 率	F	9 %
	F	91 %
	F	100 %
	器具光束	3280 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.23 H
B-B	1.23 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	306	306	306
10°	301	301	301
20°	283	283	283
30°	255	255	255
40°	218	218	218
50°	177	177	177
60°	133	133	133
70°	91	91	91
80°	54	54	54
90°	30	30	30
100°	19	19	19
110°	15	15	15
120°	13	13	13
130°	12	12	12
140°	12	12	12
150°	11	11	11
160°	9	9	9
170°	7	7	7
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
	室指数	固有照明率 (×0.01)																							
	0.60	60	56	46	44	38	36	58	54	45	43	37	36	43	41	36	35	34	34	29	27				
	0.80	72	65	58	54	48	46	69	63	56	53	48	46	53	51	46	44	44	43	38	36				
	1.00	79	71	65	60	55	53	76	69	63	59	54	52	59	56	52	50	50	48	43	41				
	1.25	87	77	73	67	63	60	83	75	71	65	62	58	66	62	59	56	56	54	50	47				
	1.50	92	81	79	71	69	64	87	78	76	70	68	63	71	67	64	61	61	59	54	51				
	2.00	100	87	88	79	80	73	95	84	85	77	77	71	79	74	73	69	69	66	61	58				
	2.50	104	90	94	83	86	78	100	88	91	81	83	76	84	78	78	73	73	70	66	63				
	3.00	108	93	99	87	91	81	103	90	95	85	88	80	88	81	82	77	77	74	70	66				
	4.00	113	96	105	91	99	87	107	93	101	89	95	85	93	85	88	82	82	78	75	71				
	5.00	115	98	109	94	103	90	110	95	104	92	99	88	96	88	92	85	86	81	78	74				
	10.00	122	102	118	99	114	97	116	99	113	97	110	95	103	93	101	91	93	88	85	81				

