

東芝照明器具配光データシート


非常灯

名 称	非常用照明器具 専用形
形 名	LEDEM30824


保 守 率
0.86
光 束 換 算 係 数
1.00

光 源	平常時	x
	非常時	LEM-301001 (W) x 1
光 束	定 格	1000 lm
	非常時	1000 lm

前 面
カバー（透明）
反射面



	θ 
	ϕ 

備考	高天井用
----	------

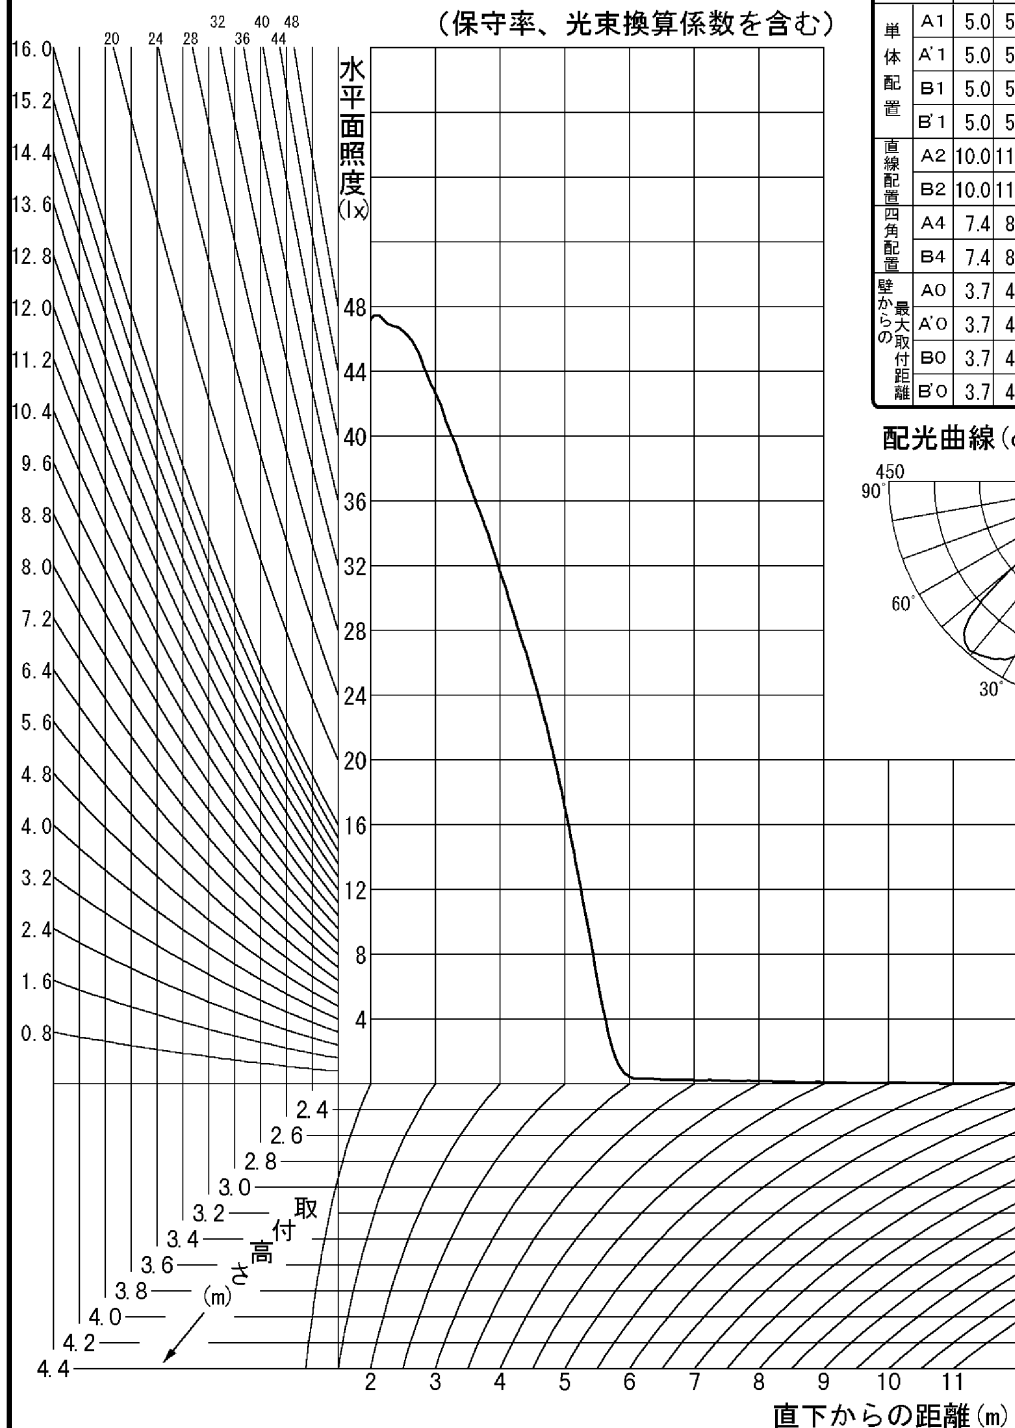

配置表（保守率、光束換算係数を含む）											
取付高さ	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	12.0	14.0	
単 体 配 置	A1	5.0	5.6	6.1	7.0	7.7	8.1	7.9	-	-	-
	A'1	5.0	5.6	6.1	7.0	7.7	8.1	7.9	-	-	-
	B1	5.0	5.6	6.1	7.0	7.7	8.1	7.9	-	-	-
	B'1	5.0	5.6	6.1	7.0	7.7	8.1	7.9	-	-	-
直 線 配 置 四 角 配 置	A2	10.0	11.2	12.4	14.6	16.8	18.6	20.4	21.6	22.4	20.2
	B2	10.0	11.2	12.4	14.6	16.8	18.6	20.4	21.6	22.4	20.2
	A4	7.4	8.3	9.2	10.8	12.5	14.1	15.6	17.1	19.7	20.2
	B4	7.4	8.3	9.2	10.8	12.5	14.1	15.6	17.1	19.7	20.2
壁 からの 最大 取付 距離	A0	3.7	4.1	4.5	5.2	5.9	6.3	6.2	0.2	0.2	0.2
	A'0	3.7	4.1	4.5	5.2	5.9	6.3	6.2	0.2	0.2	0.2
	B0	3.7	4.1	4.5	5.2	5.9	6.3	6.2	0.2	0.2	0.2
	B'0	3.7	4.1	4.5	5.2	5.9	6.3	6.2	0.2	0.2	0.2

配光曲線 (cd/1000lm)

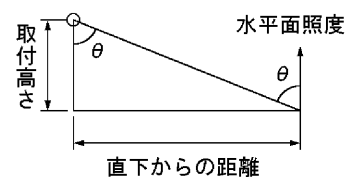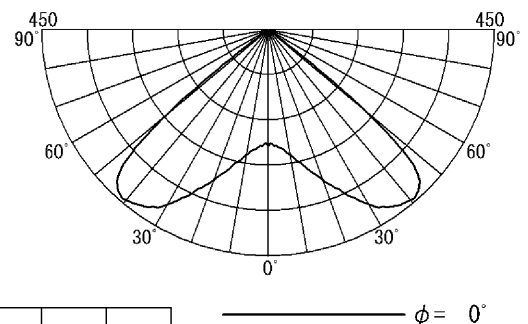


東芝照明器具配光データシート

非常灯

名 称	非常用照明器具 専用形
形 名	LEDEM30824

保 守 率
0.86
光 束 換 算 係 数
1.00

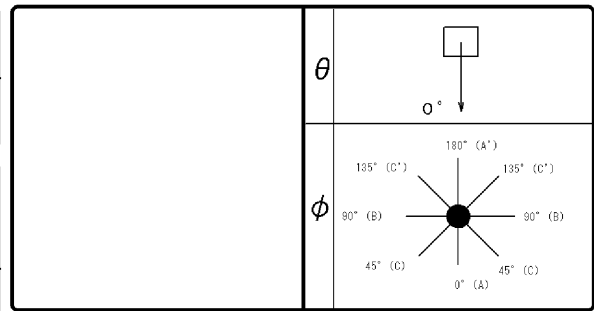

光源	平常時	x
	非常時	LEM-301001 (W) x 1
光束	定 格	1000 lm
	非常時	1000 lm

前 面
カバー (透明)
反射面


備 考	高天井用
-----	------

光度 (cd/1000lm)						
$\theta \backslash \phi$	0° (A)	45° (C)	90° (B)	135° (C')	180° (A')	
0°	232					
10°	252					
20°	318					
30°	402					
40°	442					
50°	258					
60°	8					
70°	3					
80°	0					
90°	0					
100°	0					
110°	0					
120°	0					
130°	0					
140°	0					
150°	0					
160°	0					
170°	0					
180°	0					

器具直下からの各方向への指定照度が得られる距離 (m) (保守率、光束換算係数を含む)																
照度 (lx) ϕ	取付け高さ (m)	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10.0	12.0	14.0	16.0	18.0	20.0	-	-
2	0°	5.0	5.6	6.1	7.0	7.7	8.1	7.9	-	-	-	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
1	0°	5.2	5.8	6.3	7.5	8.5	9.5	10.3	11.0	11.3	0.2	-	-	-	-	-
	45°															
	90°															
	135°															
	180°															
0.5	0°	5.3	5.9	6.5	7.7	8.9	10.0	11.1	12.1	14.0	15.4	16.1	15.8	-	-	-
	45°															
	90°															
	135°															
	180°															

東芝照明器具配光データシート

非常灯

名 称	非常用照明器具 専用形	保 守 率	0.86	
形 名	LEDEM30824	光 束 換 算 係 数	1.00	
光 源	平常時	×		
	非常時	LEM-301001 (W)	× 1	
光 束	定 格	1000 lm	前 面	カバ ー (透 明)
	非常時	1000 lm	反 射 面	
備 考				高天井用

配置表 (保守率、光束換算係数を含む)

取 付 高 さ		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単 体 配 置	A1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.6	3.7	3.9	4.0	4.1	4.2	4.3	4.4	4.6
	A'1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.6	3.7	3.9	4.0	4.1	4.2	4.3	4.4	4.6
	B1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.6	3.7	3.9	4.0	4.1	4.2	4.3	4.4	4.6
	B'1	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.6	3.7	3.9	4.0	4.1	4.2	4.3	4.4	4.6
直 線 配 置	A2	5.2	5.4	5.6	6.0	6.2	6.4	6.8	7.0	7.2	7.6	7.8	8.0	8.2	8.6	8.8	9.0
	B2	5.2	5.4	5.6	6.0	6.2	6.4	6.8	7.0	7.2	7.6	7.8	8.0	8.2	8.6	8.8	9.0
四 角 配 置	A4	4.0	4.2	4.4	4.6	4.8	4.9	5.1	5.3	5.5	5.6	5.8	6.0	6.2	6.3	6.5	6.7
	B4	4.0	4.2	4.4	4.6	4.8	4.9	5.1	5.3	5.5	5.6	5.8	6.0	6.2	6.3	6.5	6.7
壁からの 最大取付距離	A0	2.1	2.2	2.3	2.4	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.2	3.3	3.4
	A'O	2.1	2.2	2.3	2.4	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.2	3.3	3.4
	B0	2.1	2.2	2.3	2.4	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.2	3.3	3.4
	B'O	2.1	2.2	2.3	2.4	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.2	3.3	3.4

取 付 高 さ		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単 体 配 置	A1	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.5	5.6	6.1	6.6	7.0	7.4	7.7	7.9	8.1
	A'1	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.5	5.6	6.1	6.6	7.0	7.4	7.7	7.9	8.1
	B1	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.5	5.6	6.1	6.6	7.0	7.4	7.7	7.9	8.1
	B'1	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.5	5.6	6.1	6.6	7.0	7.4	7.7	7.9	8.1
直 線 配 置	A2	9.2	9.6	9.8	10.0	10.2	10.6	10.8	11.0	11.2	12.4	13.6	14.6	15.8	16.8	17.8	18.6
	B2	9.2	9.6	9.8	10.0	10.2	10.6	10.8	11.0	11.2	12.4	13.6	14.6	15.8	16.8	17.8	18.6
四 角 配 置	A4	6.9	7.0	7.2	7.4	7.6	7.8	7.9	8.1	8.3	9.2	10.0	10.8	11.7	12.5	13.3	14.1
	B4	6.9	7.0	7.2	7.4	7.6	7.8	7.9	8.1	8.3	9.2	10.0	10.8	11.7	12.5	13.3	14.1
壁からの 最大取付距離	A0	3.5	3.6	3.6	3.7	3.8	3.9	3.9	4.0	4.1	4.5	4.9	5.2	5.6	5.9	6.1	6.3
	A'O	3.5	3.6	3.6	3.7	3.8	3.9	3.9	4.0	4.1	4.5	4.9	5.2	5.6	5.9	6.1	6.3
	B0	3.5	3.6	3.6	3.7	3.8	3.9	3.9	4.0	4.1	4.5	4.9	5.2	5.6	5.9	6.1	6.3
	B'O	3.5	3.6	3.6	3.7	3.8	3.9	3.9	4.0	4.1	4.5	4.9	5.2	5.6	5.9	6.1	6.3


取 付 高 さ	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
単 体 配 置	A1	8.0	7.9	7.6	-	-	-	-	-	-	-	-	-	-	-	-
	A'1	8.0	7.9	7.6	-	-	-	-	-	-	-	-	-	-	-	-
	B1	8.0	7.9	7.6	-	-	-	-	-	-	-	-	-	-	-	-
	B'1	8.0	7.9	7.6	-	-	-	-	-	-	-	-	-	-	-	-
直 線 配 置	A2	19.6	20.4	21.0	21.6	22.2	22.4	22.6	22.4	22.2	21.8	21.2	20.2	-	-	-
	B2	19.6	20.4	21.0	21.6	22.2	22.4	22.6	22.4	22.2	21.8	21.2	20.2	-	-	-
四 角 配 置	A4	14.9	15.6	16.4	17.1	17.8	18.4	19.1	19.7	20.2	20.8	21.2	20.2	-	-	-
	B4	14.9	15.6	16.4	17.1	17.8	18.4	19.1	19.7	20.2	20.8	21.2	20.2	-	-	-
壁からの 最大取付距離	A0	6.3	6.2	6.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	-	-	-
	A'O	6.3	6.2	6.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	-	-	-
	B0	6.3	6.2	6.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	-	-	-
	B'O	6.3	6.2	6.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	-	-	-

東芝照明器具配光データシート

非常灯

名 称	非常用照明器具 専用形
形 名	LEDEM30824

保 守 率
0.86
光 束 換 算 係 数
1.00

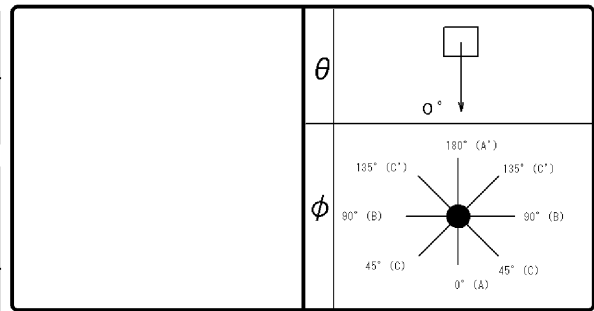

光 源	平常時	×
	非常時	LEM-301001 (W) × 1
光 束	定 格	1000 lm
	非常時	1000 lm

前 面
カバー（透明）
反射面

備 考	高天井用
-----	------

器具直下からの各方面への指定照度が得られる距離(m) (保守率、光束換算係数を含む)

照度 (lx)	取付け高さ (m)	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
2	0°	2.8	2.9	3.0	3.1	3.3	3.4	3.5	3.6	3.7	3.9	4.0	4.1	4.2	4.3	4.4	4.6
	45°																
	90°																
	135°																
	180°																
1	0°	2.8	3.0	3.1	3.2	3.3	3.5	3.6	3.7	3.8	4.0	4.1	4.2	4.3	4.4	4.6	4.7
	45°																
	90°																
	135°																
	180°																
0.5	0°	2.9	3.0	3.1	3.3	3.4	3.5	3.7	3.8	3.9	4.0	4.2	4.3	4.4	4.5	4.6	4.8
	45°																
	90°																
	135°																
	180°																

照度 (lx)	取付け高さ (m)	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
2	0°	4.7	4.8	4.9	5.0	5.1	5.2	5.3	5.5	5.6	6.1	6.6	7.0	7.4	7.7	7.9	8.1
	45°																
	90°																
	135°																
	180°																
1	0°	4.8	4.9	5.0	5.2	5.3	5.4	5.5	5.6	5.8	6.3	6.9	7.5	8.0	8.5	9.0	9.5
	45°																
	90°																
	135°																
	180°																
0.5	0°	4.9	5.0	5.2	5.3	5.4	5.5	5.7	5.8	5.9	6.5	7.1	7.7	8.3	8.9	9.5	10.0
	45°																
	90°																
	135°																
	180°																

照度 (lx)	取付け高さ (m)	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0
2	0°	8.0	7.9	7.6	-	-	-	-	-	-	-	-	-	-	-	-	-
	45°																
	90°																
	135°																
	180°																
1	0°	9.9	10.3	10.6	11.0	11.2	11.4	11.4	11.3	11.3	11.0	10.7	0.2	-	-	-	-
	45°																
	90°																
	135°																
	180°																
0.5	0°	10.6	11.1	11.6	12.1	12.6	13.1	13.5	14.0	14.4	14.7	15.1	15.4	15.7	15.9	16.0	16.1
	45°																
	90°																
	135°																
	180°																