


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF7WWWGX53 /C7/700
光束	740 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

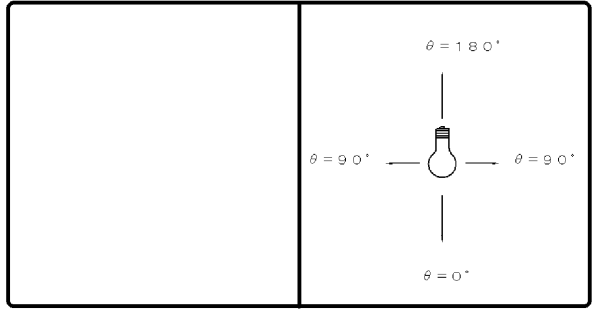

効率	F		%
	F		%
	F	100	%
	器具光束	740	lm

最大取付間隔	
A-A	0.63 H
B-B	0.63 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1279		
10°	1026		
20°	648		
30°	359		
40°	183		
50°	86		
60°	54		
70°	36		
80°	24		
90°	8		
100°	6		
110°	4		
120°	2		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70	50	30		70	50	30		50	30			50	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照明率 (×0.01)																			
0.60		82	76	72	68	65	63	81	75	71	68	65	63	69	67	64	63	63	62	59	58
0.80		93	85	83	78	77	73	91	84	82	77	76	73	80	76	75	72	73	72	69	68
1.00		97	88	87	81	81	77	95	86	86	80	80	76	83	79	78	75	77	75	72	70
1.25		102	91	93	85	86	80	100	90	91	84	84	80	88	82	82	79	80	78	75	73
1.50		106	93	97	88	90	83	103	92	95	87	88	83	91	85	86	82	83	81	78	76
2.00		111	97	103	92	97	88	108	95	100	91	95	87	96	89	91	86	88	85	82	80
2.50		114	99	107	95	101	91	111	97	104	94	99	90	99	91	95	89	91	87	85	83
3.00		117	100	110	97	105	94	113	99	107	95	102	93	101	93	98	91	93	89	87	85
4.00		120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	92	90	88
5.00		122	103	118	101	114	99	118	102	114	100	111	98	107	98	104	96	99	94	92	90
10.00		127	106	124	105	122	104	122	105	120	104	118	103	112	101	111	100	104	98	97	94

