


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDG87900N-LS

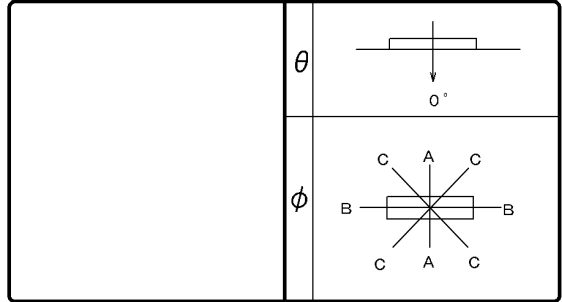

効 率	F	10%
	F	89%
	F	99%
	器具光束	1150 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

天井直付
備考

θ	A-A	B-B	C-C
0°	263		
10°	259		
20°	245		
30°	224		
40°	198		
50°	168		
60°	136		
70°	103		
80°	73		
90°	49		
100°	32		
110°	19		
120°	11		
130°	5		
140°	2		
150°	2		
160°	2		
170°	2		
180°	2		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	57	53	43	41	34	33	55	51	42	40	34	33	40	38	32	31	31	30	26	23					
0.80	69	62	54	51	45	43	66	60	52	49	44	42	49	47	42	40	40	39	34	31					
1.00	76	68	61	57	51	49	72	66	59	55	50	48	55	53	48	46	45	44	39	36					
1.25	83	74	69	63	59	55	79	71	67	62	58	54	62	59	55	52	52	50	45	42					
1.50	88	78	75	68	65	60	84	75	72	66	63	59	67	63	60	57	56	55	49	46					
2.00	96	84	84	75	75	69	92	81	81	74	73	67	75	70	68	64	64	62	57	53					
2.50	101	87	90	80	82	74	96	85	87	78	79	72	80	74	74	69	69	66	62	58					
3.00	105	90	95	83	87	78	100	87	91	81	84	76	84	77	78	73	73	70	65	62					
4.00	110	93	102	88	95	83	104	91	97	86	91	81	89	82	84	78	78	75	70	67					
5.00	113	95	106	91	99	86	107	93	101	88	95	85	92	84	88	81	82	78	74	70					
10.00	119	100	115	97	111	94	113	97	110	95	106	92	100	90	97	88	90	85	81	78					

