


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDB87901N-LS

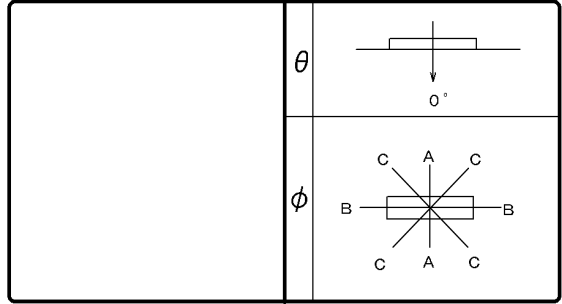

効 率	F	17 %
	F	82 %
	F	99 %
	器具光束	1090 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.37 H
B-B	1.18 H

天井直付
備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	239	239	239
10°	237	233	235
20°	229	216	223
30°	217	191	205
40°	200	159	181
50°	179	125	155
60°	155	90	127
70°	129	55	101
80°	105	23	78
90°	83	7	59
100°	64	6	45
110°	50	6	34
120°	38	7	26
130°	30	7	21
140°	23	7	17
150°	18	7	12
160°	12	7	9
170°	9	6	6
180°	3	9	8

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	10	0	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	56	52	42	40	34	32	54	50	41	39	33	32	38	36	31	30	29	28	24	21
0.80	68	61	53	50	43	42	64	59	51	48	42	41	47	45	40	39	37	37	32	29
1.00	74	67	60	56	50	48	70	64	58	54	49	46	53	50	46	44	43	42	36	33
1.25	82	73	68	62	58	54	77	70	65	60	56	53	60	56	52	50	49	47	42	38
1.50	87	76	73	67	64	59	82	73	70	64	61	57	64	60	57	54	53	51	46	42
2.00	95	82	83	74	74	67	89	79	79	72	71	65	72	67	65	62	60	58	53	49
2.50	99	86	89	78	80	72	94	83	84	76	77	70	77	71	71	66	65	62	57	53
3.00	103	88	93	82	85	76	97	85	89	79	82	74	81	74	75	70	69	66	61	56
4.00	108	92	100	86	93	81	102	88	95	84	89	79	86	78	81	75	74	70	66	61
5.00	111	94	104	89	98	85	105	90	98	86	93	82	89	81	85	78	77	73	69	64
10.00	117	98	113	95	109	93	111	95	107	93	104	90	96	87	94	85	85	80	76	71

