

東芝照明器具配光データシート


名称	LED照明器具
形名	LEDC88161-7G

光源	名称	LEDランプ
	形名	LDA5L-G-E17 /S/40W
	光束	440 lm × 7

前面	
反射面	

保守率	良	0.67
	中	0.63
	否	0.56

効率	F	13%
	F	72%
	F	85%
	器具光束	2620 lm

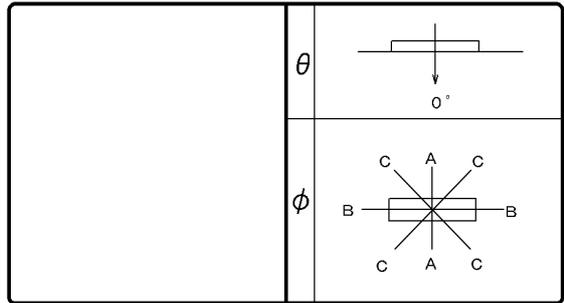

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	148		
10°	145		
20°	145		
30°	144		
40°	141		
50°	135		
60°	120		
70°	97		
80°	83		
90°	68		
100°	31		
110°	22		
120°	17		
130°	12		
140°	9		
150°	7		
160°	6		
170°	3		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	50	30	30	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	照明率 (×0.01)																							
0.60	45	42	33	31	25	24	43	40	31	30	24	23	29	28	23	22	21	21	17	14				
0.80	55	50	41	39	33	31	52	47	40	38	32	31	37	35	30	29	28	27	23	20				
1.00	61	55	48	44	39	37	57	52	46	43	37	36	42	40	35	34	32	32	27	24				
1.25	67	60	54	50	45	42	64	57	52	48	44	41	48	45	41	39	38	37	32	28				
1.50	72	63	59	54	50	47	68	60	57	52	48	45	52	48	45	43	42	40	35	32				
2.00	79	68	68	60	59	54	74	66	65	58	57	52	59	54	52	49	48	46	41	38				
2.50	83	72	73	64	65	58	78	69	69	62	62	57	63	58	57	53	52	50	45	42				
3.00	86	74	77	68	70	62	81	71	73	65	67	60	66	61	61	57	56	53	49	45				
4.00	91	77	83	72	76	67	86	74	79	69	73	65	71	65	66	61	61	58	53	49				
5.00	93	79	87	74	81	70	88	76	82	72	77	68	74	67	70	64	64	60	56	52				
10.00	100	83	96	80	92	78	94	81	90	78	87	76	81	73	79	71	71	67	64	60				

