


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD87003L (W) -LD

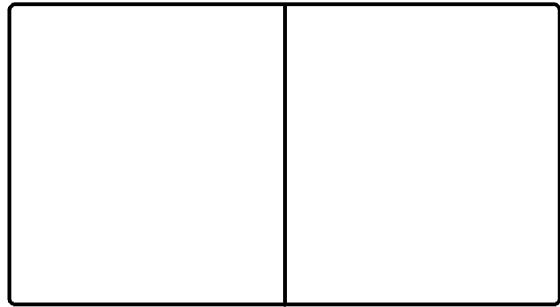

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	700 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	430		
10°	421		
20°	393		
30°	346		
40°	281		
50°	208		
60°	137		
70°	59		
80°	7		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70			50			30		20	0			
	壁	70		50		30		70		50		30		50		30				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10			
室指数	固有照明率 (×0.01)																			
0.60	67	61	53	51	45	44	65	60	53	50	45	44	51	49	44	43	43	39	37	
0.80	79	72	66	62	58	55	77	71	65	62	57	55	63	60	56	54	55	54	50	48
1.00	86	78	74	68	65	62	84	76	72	68	64	61	70	66	63	61	61	60	56	54
1.25	94	84	82	75	73	69	91	82	80	74	72	68	77	73	70	67	69	67	63	61
1.50	99	87	88	80	79	74	96	86	86	79	78	73	82	77	76	72	74	71	67	66
2.00	107	93	97	87	90	82	103	91	95	86	88	81	90	84	85	80	82	79	75	73
2.50	111	96	103	91	96	86	107	94	100	90	94	86	95	88	90	84	86	83	80	78
3.00	114	98	107	94	101	90	110	97	104	92	98	89	98	90	94	87	90	86	83	81
4.00	118	101	112	97	107	94	114	99	109	96	104	93	103	94	99	92	95	90	88	86
5.00	121	102	116	99	111	97	116	101	112	98	108	96	105	96	102	94	97	92	90	88
10.00	126	105	123	104	120	102	121	104	119	103	117	101	111	100	109	99	103	97	96	94

