


東芝ランプ 配光データシート

名称	LEDライトエンジン
形名	LECF/18N-W1 9GH-T
光束	1910 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

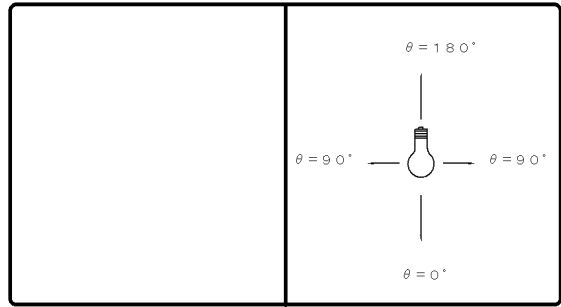

効率	F	%
	F	%
	F	100 %
	器具光束	1910 lm

最大取付間隔	
A-A	1.13 H
B-B	1.13 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	528		
10°	523		
20°	480		
30°	402		
40°	280		
50°	141		
60°	86		
70°	49		
80°	21		
90°	4		
100°	4		
110°	3		
120°	3		
130°	4		
140°	3		
150°	3		
160°	2		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0	
室指数	照明率 (×0.01)																							
0.60	72	66	59	56	52	50	70	65	59	56	51	50	57	55	51	49	50	49	45	43				
0.80	84	76	72	68	64	62	82	75	71	67	64	61	69	66	62	60	61	60	56	54				
1.00	90	81	79	73	71	67	88	80	77	72	70	67	74	71	68	66	66	65	61	59				
1.25	97	86	86	79	78	73	94	85	84	78	77	72	81	76	75	71	72	70	67	65				
1.50	102	89	91	83	83	77	98	88	89	82	82	77	85	80	79	75	77	74	71	69				
2.00	109	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	77	75				
2.50	112	97	104	92	98	88	109	95	101	91	96	87	96	89	91	86	88	84	81	79				
3.00	115	99	108	95	102	91	111	97	105	94	100	90	99	91	95	88	91	87	84	82				
4.00	119	101	113	98	108	95	115	100	110	97	105	94	103	94	100	92	95	90	88	85				
5.00	121	103	116	100	112	97	117	101	113	99	109	96	106	96	103	94	97	92	90	88				
10.00	126	105	123	104	121	103	121	104	119	103	117	101	111	100	109	99	102	97	95	93				

