


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87936L (K) -LS

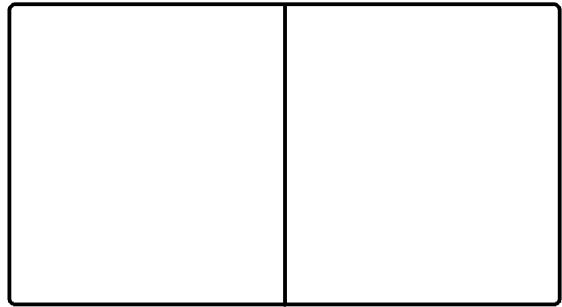

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	230 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	476	476	476
10°	475	473	475
20°	453	454	457
30°	385	415	410
40°	262	340	315
50°	147	211	190
60°	72	93	93
70°	25	35	39
80°	8	11	12
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	1	0	1
170°	1	1	1
180°	1	1	1

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	71	65	58	55	50	49	69	64	57	54	50	48	56	54	49	48	48	44	42	
0.80	83	76	71	67	63	61	81	74	70	66	63	60	68	65	62	60	60	59	55	54
1.00	90	81	78	72	70	67	88	79	77	72	69	66	74	70	68	65	66	65	61	59
1.25	97	86	86	79	78	73	94	85	84	78	77	73	81	76	75	72	73	71	67	66
1.50	101	89	91	83	84	78	99	88	89	82	82	77	86	80	80	76	78	75	72	70
2.00	109	95	100	89	93	85	105	93	97	88	91	84	93	87	88	83	85	82	79	77
2.50	113	97	105	93	98	89	109	96	102	92	96	88	97	90	93	87	89	85	83	81
3.00	115	99	109	95	103	92	112	98	106	94	100	91	100	92	96	89	92	88	85	84
4.00	119	101	114	98	109	96	115	100	110	97	106	95	104	95	101	93	96	92	89	87
5.00	121	103	117	100	112	98	117	101	113	99	109	97	106	97	104	95	98	93	91	90
10.00	126	105	123	104	121	103	121	104	119	103	117	102	111	101	110	100	103	98	96	94

