


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87842-LS

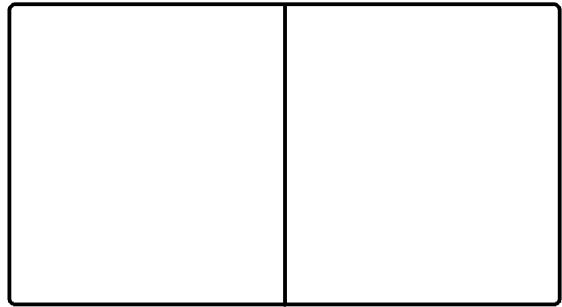

効 率	F	53%
	F	47%
	F	100%
	器具 光束	480 lm

保守 率	良	0.67
	中	0.63
	否	0.56


前面	
反射面	

最大取付間隔	
A-A	7.2 H
B-B	1.0 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	7	2	2
10°	9	2	7
20°	19	2	14
30°	30	1	20
40°	52	1	29
50°	121	1	48
60°	205	1	92
70°	225	1	128
80°	173	2	133
90°	117	2	123
100°	124	2	123
110°	162	2	128
120°	188	2	127
130°	177	2	113
140°	140	1	85
150°	89	1	46
160°	27	0	14
170°	10	0	6
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
		床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	固有照明率 (×0.01)																							
0.60	45	42	30	29	21	21	40	37	27	26	19	19	21	20	15	15	11	10	5	1				
0.80	54	49	38	36	28	27	48	44	34	32	25	24	27	26	20	19	14	14	8	3				
1.00	60	54	45	42	34	32	54	49	40	38	31	29	32	30	24	23	18	17	11	5				
1.25	68	60	52	48	41	39	60	54	47	43	37	35	37	35	29	28	22	21	14	7				
1.50	72	64	57	52	46	43	64	58	52	47	42	39	41	38	33	32	25	24	17	9				
2.00	81	70	67	60	56	51	72	64	60	54	51	47	47	44	40	38	31	30	22	13				
2.50	86	74	73	65	63	57	76	67	66	59	57	52	52	48	45	42	35	33	25	16				
3.00	90	77	78	69	69	61	80	70	70	63	62	56	56	51	49	46	38	36	28	19				
4.00	95	81	85	74	77	68	85	74	77	68	69	62	61	56	56	51	43	41	33	23				
5.00	99	83	90	77	83	72	88	76	81	71	74	66	64	59	60	55	46	44	36	26				
10.00	107	89	101	85	96	82	96	82	91	79	87	76	73	66	70	63	55	52	44	33				

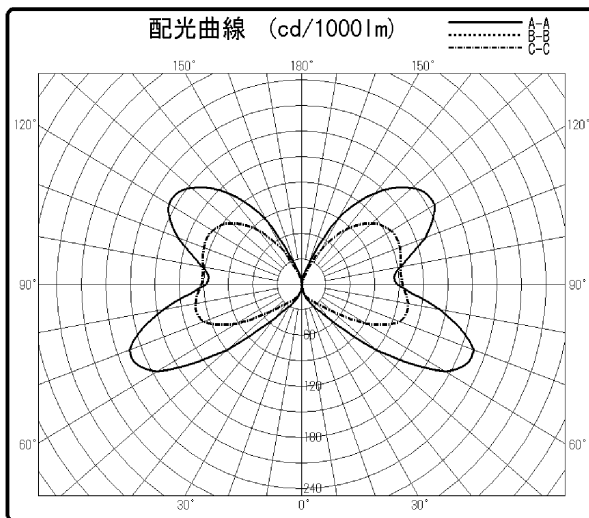

[高さ (m)]	[単位 lx]								初期値
0									-°
1									
2									
3									
4									
5									
	4	3	2	1	0	1	2	3	4
	A-A				B-B				