


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG87034L-LS

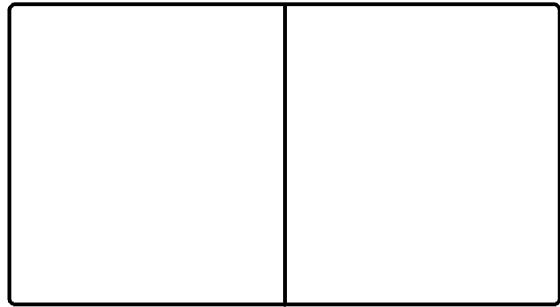

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	625 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	336	336	336
10°	331	330	331
20°	315	312	314
30°	288	284	287
40°	252	247	250
50°	207	201	205
60°	157	150	155
70°	104	96	101
80°	51	43	48
90°	5	0	2
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	62	57	47	45	39	38	60	56	47	45	38	37	45	43	38	37	37	36	32	30
0.80	74	67	60	56	50	48	72	66	58	55	50	48	56	54	49	47	48	47	42	40
1.00	81	73	67	62	58	55	79	71	66	61	57	54	63	60	55	53	54	53	48	46
1.25	89	79	76	69	66	62	86	77	74	68	65	61	71	66	63	60	61	59	55	53
1.50	94	83	81	74	72	67	91	81	79	73	71	66	76	71	69	65	66	64	60	58
2.00	102	89	91	82	83	76	99	87	89	81	81	75	84	79	78	74	75	72	68	66
2.50	107	92	97	86	89	81	103	91	95	85	87	80	90	83	84	78	80	77	73	71
3.00	111	95	102	89	95	85	107	93	99	88	93	84	94	86	88	82	84	81	77	75
4.00	115	98	108	94	102	90	111	97	105	93	100	89	99	90	94	87	90	86	83	80
5.00	118	100	112	96	107	93	114	99	109	95	104	92	102	93	98	90	93	89	86	84
10.00	124	104	121	102	118	100	120	103	117	101	114	99	109	99	107	97	101	95	93	91

