


# ■ 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF4VWHGX53 /C7/400
光束	430 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

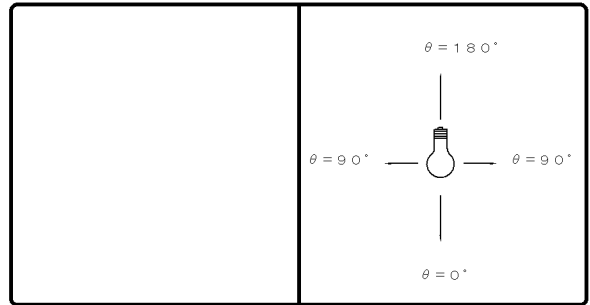

効率	F		%
	F		%
	F	100	%
	器具光束	430	lm

最大取付間隔	
A-A	1.18 H
B-B	1.18 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta$	A-A	B-B	C-C
0°	380		
10°	371		
20°	342		
30°	297		
40°	241		
50°	183		
60°	129		
70°	80		
80°	38		
90°	14		
100°	11		
110°	10		
120°	10		
130°	9		
140°	7		
150°	6		
160°	4		
170°	2		
180°	1		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照明率 (×0.01)																					
0.60		64	59	50	48	42	40	62	57	49	47	41	40	47	45	40	39	39	38	34	32		
0.80		76	69	62	58	53	51	73	67	61	57	52	51	58	55	51	49	49	48	44	42		
1.00		83	74	69	64	60	57	80	73	68	63	59	57	64	61	57	55	55	54	49	47		
1.25		90	80	77	71	68	64	87	78	75	70	67	63	71	67	64	62	62	60	56	53		
1.50		95	84	83	75	74	69	92	82	81	74	73	68	76	71	69	66	67	64	60	58		
2.00		103	90	93	83	84	77	99	88	90	81	82	76	84	78	78	74	75	72	68	65		
2.50		108	93	98	87	91	82	103	91	95	85	88	81	89	82	83	78	79	76	72	69		
3.00		111	95	103	90	96	85	107	93	99	88	93	84	93	85	88	82	83	79	76	73		
4.00		116	98	109	94	103	90	111	96	105	92	99	89	97	89	93	86	88	84	80	78		
5.00		118	100	112	96	107	93	113	98	108	95	104	92	100	92	97	89	91	86	83	80		
10.00		124	104	121	102	118	100	119	102	116	100	113	98	107	97	105	95	98	92	90	87		

