

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEDS-15115W K-LS1

光 源	名称
	形 名 LED
	光 束 1040 lm × 1

前 面	
反射面	

良	0.81
中	0.77
否	0.68

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具光束	1040 lm

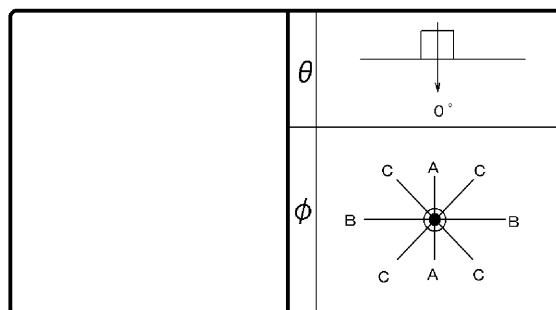

最大取付間隔	
A-A	0.4 H
B-B	0.4 H
備考	

光度 (cd/1000lm)			
0°	5672	25°	251
1°		30°	118
2°		35°	53
3°		40°	24
4°		45°	13
5°	4820	50°	11
6°		55°	6
7°		60°	3
8°		65°	2
9°		70°	0
10°	3068	75°	0
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	1274		
16°			
17°			
18°			
19°			
20°	507		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																					
0.60		97	90	90	85	85	82	96	89	89	85	84	82	88	84	84	82	83	81	80	79		
0.80		104	94	96	90	91	87	102	94	95	90	90	87	93	89	89	87	88	86	85	84		
1.00		108	97	101	93	96	91	106	96	99	93	95	90	97	92	93	90	92	89	88	87		
1.25		111	98	103	95	98	92	108	98	102	94	97	92	99	93	95	91	93	90	88	87		
1.50		113	99	106	96	100	93	110	98	104	95	99	93	100	94	96	92	94	91	89	88		
2.00		116	101	109	98	104	95	113	100	107	97	102	95	103	96	99	93	96	92	90	89		
2.50		119	102	113	100	108	97	115	101	110	99	106	96	105	97	102	95	98	94	92	91		
3.00		121	103	115	101	111	99	117	102	112	100	109	98	107	99	104	97	100	96	94	92		
4.00		124	105	120	104	116	102	120	104	116	103	113	101	110	101	108	100	103	98	97	95		
5.00		126	107	123	105	120	104	122	105	119	104	117	104	113	103	111	102	106	100	99	98		
10.00		131	109	130	109	129	110	126	108	126	108	125	109	118	107	118	107	111	105	104	103		

