


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDS-35116W K-LS1

保守率	良	0.81
	中	0.77
	否	0.68

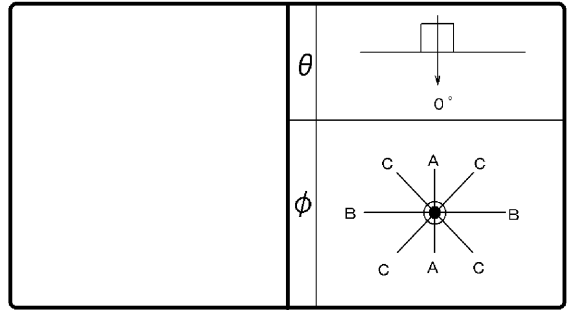

光源	名称	
	形名	LED
	光束	2700 lm × 1

効率	F	0%
	F	100%
	F	100%
	器具光束	2700 lm

最大取付間隔		備考
A-A	0.5 H	
B-B	0.5 H	

前面	
反射面	

0°	3549	25°	341
1°		30°	126
2°		35°	57
3°		40°	40
4°		45°	29
5°	3335	50°	19
6°		55°	13
7°		60°	8
8°		65°	4
9°		70°	1
10°	2603	75°	0
11°		80°	0
12°		85°	0
13°		90°	0
14°			
15°	1862		
16°			
17°			
18°			
19°			
20°	792		

反射率 (%)	天井	80						70						50						30						20						0																																			
	壁	70						50						30						70						50						30						50						30						30						10						0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																				
室指数	照明率 (×0.01)																																																																		
0.60	94	87	86	81	81	78	93	86	85	81	80	78	84	81	80	78	79	77	75	75																																															
0.80	101	92	93	87	88	84	99	91	92	87	87	84	90	86	86	83	85	83	81	80																																															
1.00	106	95	98	91	93	88	104	95	97	91	92	88	95	90	90	87	89	87	85	84																																															
1.25	109	97	101	93	96	90	107	96	100	92	95	90	97	91	93	89	91	88	86	85																																															
1.50	112	98	104	95	99	92	109	97	102	94	97	91	99	93	95	90	92	89	87	86																																															
2.00	115	100	108	97	103	94	112	99	106	96	101	94	102	95	98	92	95	91	89	88																																															
2.50	118	102	112	99	107	96	114	100	109	98	105	96	104	96	101	94	97	93	91	90																																															
3.00	120	103	115	100	110	98	116	102	112	99	108	97	106	98	103	96	99	95	93	91																																															
4.00	123	105	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94																																															
5.00	125	106	122	105	119	103	121	105	118	104	116	103	112	102	110	101	105	99	98	96																																															
10.00	130	108	128	108	127	108	125	107	124	107	123	107	117	105	116	105	110	104	103	101																																															

