

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT425523N-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	4950 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

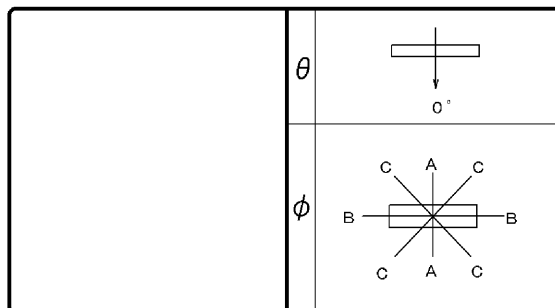

備考

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10	0			
						70		50		30		70		50		30		50		30		30		10	0			
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
				室指数	固 有 照 明 率 (×0.01)																							
0°				0.60	61	56	47	44	38	37	60	55	46	44	38	37	45	43	37	36	36	36	31	29				
10°				0.80	73	67	59	55	49	47	71	65	58	54	49	47	56	53	48	46	47	46	41	39				
20°				1.00	81	72	66	61	57	54	78	71	65	61	56	53	62	59	54	52	53	52	47	45				
30°				1.25	88	78	75	68	65	61	85	77	73	67	64	60	70	66	62	59	60	58	54	51				
40°				1.50	93	82	81	73	71	66	90	81	79	72	70	65	75	70	68	64	65	63	59	56				
50°				2.00	102	89	91	81	82	75	98	87	88	80	80	74	84	78	77	73	74	71	67	65				
60°				2.50	107	92	97	86	89	80	103	91	94	84	87	79	89	82	83	78	79	76	72	70				
70°				3.00	111	95	102	89	94	84	107	93	99	88	92	83	93	86	88	82	84	80	76	74				
80°				4.00	115	98	108	94	102	89	111	97	105	92	99	89	99	90	94	87	89	85	82	80				
90°				5.00	118	100	112	96	107	93	114	99	109	95	104	92	102	93	98	90	93	88	86	83				
100°				10.00	125	104	121	102	118	100	120	103	117	101	114	99	109	99	107	97	101	95	93	91				
110°																												
120°																												
130°																												
140°																												
150°																												
160°																												
170°																												
180°																												

