


東芝照明器具配光データシート

名 称	LED照明器具
形 名	LEKR419253N-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	2350 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

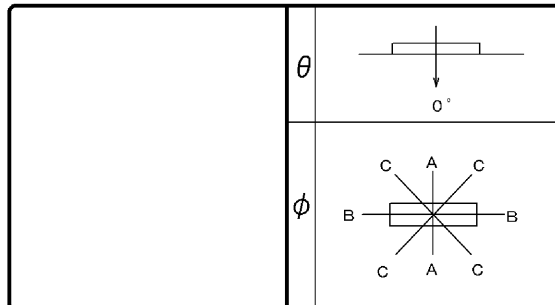

前 面	
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50		30		10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
					固有照明率 (×0.01)																										
0°	340	340	340	室指数																											
10°	335	334	335	0.60	62	57	48	46	39	38	61	56	47	45	39	38	46	44	38	37	38	37	32	31							
20°	322	315	319	0.80	75	68	60	57	51	49	72	66	59	56	51	49	57	55	50	48	48	47	43	41							
30°	299	285	295	1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	61	56	54	55	54	49	47							
40°	264	245	259	1.25	90	80	77	70	67	63	87	78	75	69	66	62	72	68	64	61	62	61	56	54							
50°	220	198	213	1.50	95	84	83	75	73	68	92	82	81	74	72	68	77	72	70	66	68	65	61	59							
60°	171	146	162	2.00	103	90	93	83	84	77	100	88	90	82	83	76	86	80	79	75	76	74	70	68							
70°	108	89	107	2.50	108	93	99	87	91	82	104	92	96	86	89	81	91	84	85	80	82	78	75	73							
80°	15	33	35	3.00	112	96	103	91	96	86	108	94	100	89	94	85	95	87	90	84	86	82	79	77							
90°	0	0	0	4.00	116	99	110	95	104	91	112	98	106	94	101	90	100	92	96	89	91	87	84	82							
100°	0	0	0	5.00	119	101	114	97	108	94	115	99	110	96	105	93	103	94	100	92	95	90	87	85							
110°	0	0	0	10.00	125	105	122	103	119	101	120	103	118	102	115	100	110	99	108	98	102	96	94	92							
120°	0	0	0																												
130°	0	0	0																												
140°	0	0	0																												
150°	0	0	0																												
160°	0	0	0																												
170°	0	0	0																												
180°	0	0	0																												

