

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT412403W-LS9

効 率	F 	6 %
	F 	94 %
	F 	100 %
器具光束		3800 lm

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

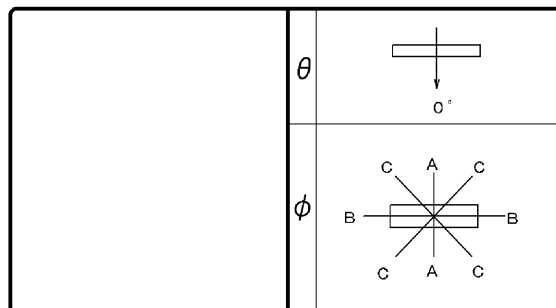

備考

光度 (cd/1000lm)				反射率 (%)	天井		80						70						50						30		20		0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁		70		50		30		70		50		30		50		30		30		10		0			
					床	室指数	固有照明率 (×0.01)																							
0°	301	301	301																											
10°	296	295	296																											
20°	283	278	280																											
30°	260	251	256																											
40°	231	215	224																											
50°	196	174	185																											
60°	158	128	144																											
70°	120	78	102																											
80°	85	30	64																											
90°	56	2	35																											
100°	34	1	18																											
110°	20	1	10																											
120°	13	1	7																											
130°	8	1	0																											
140°	0	0	0																											
150°	0	0	0																											
160°	0	0	0																											
170°	1	1	0																											
180°	1	1	1																											

