

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR430403L-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		3450 lm

保守率	良	0.86
	中	0.81
	否	0.72

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	カバー (乳白)
反射面	塗装 (白)

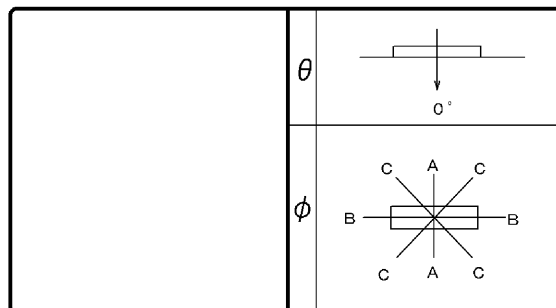

備考

光度 (cd/1000lm)				反射率 (%)	天井	80			70			50			30			20			0		
θ	φ	A-A	B-B		壁	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0	0	0
0°		330	330	330	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
10°		325	324	324	室指数																		
20°		310	305	307	固有照明率 (×0.01)																		
30°		285	276	280	0.60	61	57	47	45	38	37	60	55	46	44	38	37	45	43	37	36	37	36
40°		254	237	245	0.80	74	67	59	55	50	48	71	65	58	55	49	47	56	53	48	47	47	46
50°		222	192	204	1.00	81	73	67	62	57	54	78	71	65	61	56	54	63	59	55	53	53	52
60°		180	140	165	1.25	89	79	75	69	65	61	86	77	73	68	64	61	70	66	63	60	61	59
70°		126	85	113	1.50	94	83	81	74	72	67	91	81	79	73	70	66	75	71	68	65	66	64
80°		46	31	54	2.00	102	89	91	82	83	75	99	87	89	80	81	75	84	78	78	73	75	72
90°		0	0	0	2.50	107	93	97	86	89	81	103	91	95	85	87	80	90	83	84	78	80	77
100°		0	0	0	3.00	111	95	102	90	95	85	107	94	99	88	93	84	94	86	88	82	84	81
110°		0	0	0	4.00	116	98	109	94	103	90	112	97	105	93	100	89	99	91	95	87	90	86
120°		0	0	0	5.00	119	100	113	97	107	93	114	99	109	96	104	92	102	93	99	91	94	89
130°		0	0	0	10.00	125	104	122	102	118	101	120	103	117	101	115	100	110	99	108	98	101	96
140°		0	0	0																			
150°		0	0	0																			
160°		0	0	0																			
170°		0	0	0																			
180°		0	0	0																			

