

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR430693N-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	6500 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	カバー (乳白)
反射面	塗装 (白)

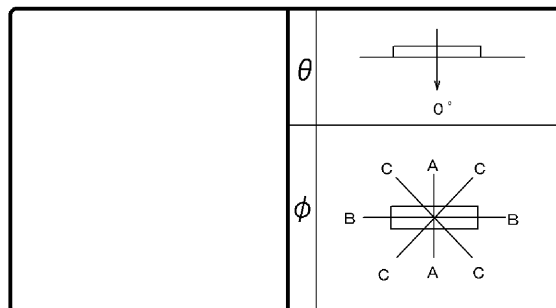

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					室指数																							
0°	330	330	330	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30			
10°	325	324	324																									
20°	310	305	307																									
30°	285	276	280																									
40°	254	237	245																									
50°	222	192	204																									
60°	180	140	165																									
70°	126	85	113																									
80°	46	31	54																									
90°	0	0	0																									
100°	0	0	0																									
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

