

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR422403L-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		3400 lm

保守率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

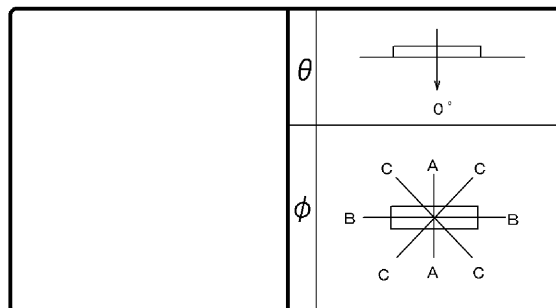

備考

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					室指数																							
0°	332	332	332	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
10°	328	326	327																									
20°	314	308	313																									
30°	291	278	285																									
40°	264	239	252																									
50°	221	193	214																									
60°	173	141	162																									
70°	119	86	110																									
80°	33	32	46																									
90°	0	0	0																									
100°	0	0	0																									
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

