

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKT212083W-LD9

効 率	F 	6 %
	F 	94 %
	F 	100 %
	器具 光束	760 lm

保 守 率	良	0.83
	中	0.81
	否	0.77

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

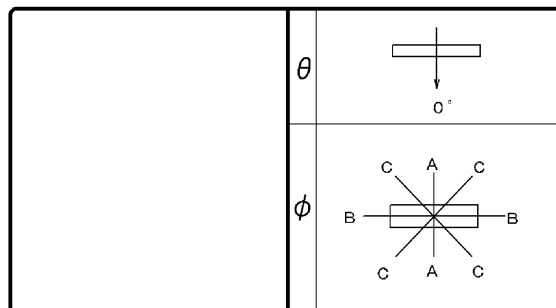

備考

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					室指数																							
0°	301	301	301	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
10°	296	295	296																									
20°	283	278	280																									
30°	260	251	256																									
40°	231	215	224																									
50°	196	174	185																									
60°	158	128	144																									
70°	120	78	102																									
80°	85	30	64																									
90°	56	2	35																									
100°	34	1	18																									
110°	20	1	10																									
120°	13	1	7																									
130°	8	1	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	1	1	0																									
180°	1	1	1																									

