


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81806-LC

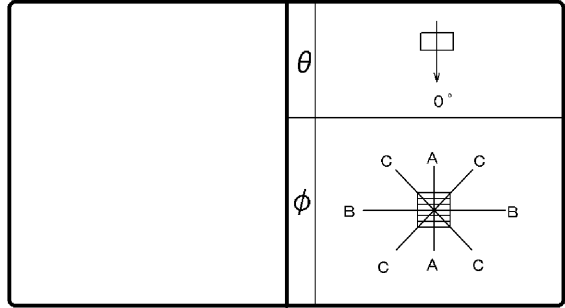

効 率	F	13%
	F	87%
	F	100%
	器具 光束	4300 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	274	274	274
10°	270	270	270
20°	256	256	256
30°	236	236	236
40°	207	207	207
50°	173	173	173
60°	135	135	135
70°	93	93	93
80°	52	52	52
90°	25	25	25
100°	22	22	22
110°	21	21	21
120°	21	21	21
130°	21	21	21
140°	20	20	20
150°	19	19	19
160°	18	18	18
170°	20	20	20
180°	20	20	20

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																							
0.60		59	54	45	42	36	35	56	52	43	41	35	34	41	39	34	33	32	32	27	25				
0.80		71	64	56	53	47	45	67	62	54	51	46	44	51	49	43	42	41	40	36	33				
1.00		78	70	63	59	54	51	74	67	61	57	52	50	57	54	50	48	47	46	41	38				
1.25		85	76	72	66	62	58	81	73	69	64	60	57	64	60	57	54	54	52	47	44				
1.50		90	79	77	70	68	63	86	77	74	68	66	62	69	65	62	59	58	56	51	48				
2.00		98	86	87	78	78	71	94	83	84	76	76	70	77	72	71	67	66	64	59	55				
2.50		103	89	93	82	85	76	98	86	89	80	82	75	82	76	76	71	71	68	63	60				
3.00		107	91	98	86	90	80	101	89	93	83	87	78	86	79	80	75	75	71	67	63				
4.00		111	95	104	90	97	86	106	92	99	88	94	84	91	83	86	80	80	76	72	68				
5.00		114	97	108	93	102	89	108	94	103	90	98	87	94	86	90	83	83	79	75	71				
10.00		121	101	117	99	113	96	114	98	111	96	108	94	101	91	99	90	90	85	82	78				

