


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH86805-LC

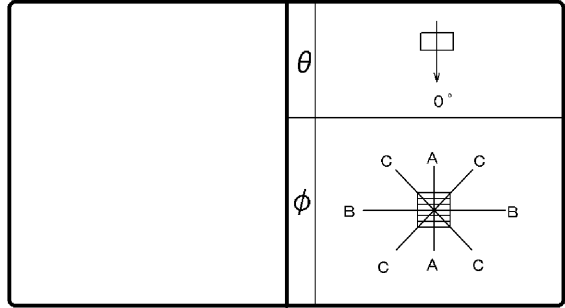

効 率	F ◡	14 %
	F ◒	86 %
	F ○	100 %
	器具 光束	6100 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	267	267	267
10°	263	263	263
20°	251	251	251
30°	231	231	231
40°	204	205	205
50°	172	172	172
60°	134	135	135
70°	94	94	94
80°	53	53	53
90°	26	26	26
100°	23	23	23
110°	22	22	22
120°	22	22	22
130°	21	21	21
140°	21	21	21
150°	20	20	20
160°	20	20	20
170°	22	22	22
180°	22	22	22

反 射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		10		30		10		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数		固有照明率 (×0.01)																																			
0.60	59	54	44	42	36	35	56	52	43	41	35	34	40	39	33	32	32	31	27	24																	
0.80	70	64	56	52	46	44	67	61	54	51	45	44	50	48	43	42	41	40	35	32																	
1.00	77	69	63	58	53	51	74	67	61	57	52	50	57	54	49	47	47	45	40	37																	
1.25	85	75	71	65	61	58	81	73	69	63	60	56	64	60	56	54	53	51	46	43																	
1.50	90	79	77	70	67	63	85	76	74	68	65	61	68	64	61	58	58	56	51	47																	
2.00	98	85	87	77	78	71	93	82	83	75	75	69	76	71	70	66	65	63	58	54																	
2.50	103	89	93	82	84	76	98	86	89	80	81	74	81	75	75	71	70	67	63	59																	
3.00	106	91	97	85	90	80	101	88	93	83	86	78	85	78	80	74	74	71	66	62																	
4.00	111	94	104	90	97	85	105	92	99	87	93	83	90	83	86	79	79	75	71	67																	
5.00	114	96	108	92	102	89	108	94	103	90	98	86	93	85	90	82	82	78	74	70																	
10.00	120	101	117	98	113	96	114	98	111	96	108	94	100	91	98	89	90	85	81	77																	

