


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDS87900YL (W) -LS

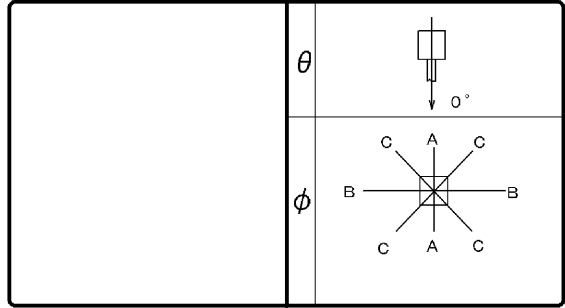

効 率	F	0 %
	F	89 %
	F	89 %
	器具 光束	475 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	334		
10°	330		
20°	309		
30°	273		
40°	229		
50°	181		
60°	131		
70°	81		
80°	34		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	1		
160°	1		
170°	1		
180°	1		

反射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10				
室指数		固有照明率 (×0.01)																																			
0.60		57	52	44	42	37	36	55	51	44	42	37	35	42	41	36	35	35	35	31	29																
0.80		68	62	55	52	47	45	66	60	54	51	47	45	53	50	46	45	45	44	40	38																
1.00		74	67	62	58	54	51	72	65	61	57	53	51	59	55	52	50	51	49	45	43																
1.25		81	72	70	64	61	57	79	71	68	63	60	57	65	61	59	56	57	55	51	49																
1.50		86	75	75	68	67	62	83	74	73	67	66	61	70	65	63	60	61	59	56	54																
2.00		93	81	84	75	76	69	90	79	81	74	75	69	77	72	72	68	69	66	63	61																
2.50		97	84	89	78	82	74	94	82	86	77	80	73	82	76	77	72	74	71	67	66																
3.00		100	86	93	81	87	77	97	85	90	80	84	77	85	78	81	75	77	74	71	69																
4.00		104	89	98	85	93	82	101	87	95	84	91	81	90	82	86	79	82	78	75	74																
5.00		107	90	102	87	97	85	103	89	98	86	94	84	92	84	89	82	85	80	78	76																
10.00		112	94	109	92	107	90	108	92	105	91	103	90	98	89	97	88	91	86	84	82																

