


東芝照明器具配光データシート

名称	有機EL照明器具
形名	YELB01001LW-LS1

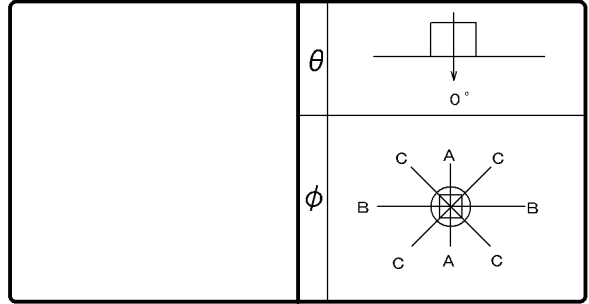

効 率	F ◡	28 %
	F ◒	72 %
	F ○	100 %
	器具 光束	59 lm

保 守 率	良	0.69
	中	0.67
	否	0.63

前面	カバー (フロスト)
反射面	

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	233	233	233
10°	230	230	230
20°	218	220	218
30°	199	201	201
40°	172	177	176
50°	140	143	141
60°	107	111	102
70°	82	84	77
80°	46	48	48
90°	10	12	12
100°	27	27	31
110°	58	60	60
120°	66	68	70
130°	60	63	63
140°	48	49	46
150°	31	32	32
160°	19	20	19
170°	7	12	10
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	10	0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数		固有照明率 (×0.01)																			
0.60		57	53	44	41	35	34	54	50	42	40	34	33	38	36	31	31	29	28	24	21
0.80		68	62	54	51	45	44	64	59	52	49	44	42	47	45	40	39	37	36	31	28
1.00		75	67	61	57	52	49	71	64	58	55	50	48	53	50	46	44	42	41	36	32
1.25		83	73	69	64	60	56	77	70	66	61	57	54	59	56	52	50	48	46	41	37
1.50		87	77	75	68	66	61	82	73	71	65	63	59	64	60	57	54	52	50	45	40
2.00		95	83	84	75	76	69	89	79	80	72	72	67	71	66	65	61	59	57	51	46
2.50		100	86	90	80	82	74	93	82	85	76	78	71	76	70	70	66	63	60	55	50
3.00		104	89	95	83	87	78	97	85	89	80	83	75	79	73	74	69	66	64	58	53
4.00		108	92	101	87	95	83	101	88	95	84	89	80	84	77	80	74	71	68	63	57
5.00		111	94	105	90	99	87	104	90	98	86	94	83	87	79	83	77	74	70	65	59
10.00		117	98	114	96	110	94	109	94	106	92	104	90	93	84	91	83	80	76	72	65

