


東芝照明器具配光データシート

名称	有機EL照明器具
形名	YELB01002LW-LS1

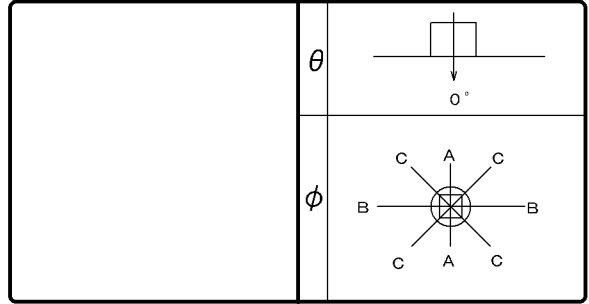

効 率	F ◡	26 %
	F ◒	74 %
	F ○	100 %
	器具 光束	63 lm

保 守 率	良	0.69
	中	0.67
	否	0.63

前面	カバー (フロスト)
反射面	

最大取付間隔	
A-A	1.32 H
B-B	1.32 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	222	223	223
10°	223	223	223
20°	216	216	216
30°	197	202	200
40°	176	183	178
50°	151	157	151
60°	120	125	119
70°	80	86	82
80°	34	37	37
90°	8	8	8
100°	22	19	21
110°	55	53	53
120°	72	74	70
130°	70	70	69
140°	53	55	48
150°	31	29	19
160°	10	11	11
170°	3	5	5
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	10	0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数		固有照明率 (×0.01)																			
0.60		57	52	43	41	35	34	54	50	41	39	34	33	38	36	31	30	29	28	24	21
0.80		68	62	54	51	45	43	64	59	52	49	43	42	47	45	40	39	37	36	31	28
1.00		75	67	61	57	52	49	71	64	58	55	50	48	53	50	46	44	42	41	36	32
1.25		83	73	69	64	60	56	78	70	66	61	58	54	60	56	53	50	48	47	41	37
1.50		88	77	75	68	66	61	82	73	71	65	63	59	64	60	58	55	52	51	45	41
2.00		96	83	85	76	76	70	90	79	80	73	73	67	72	67	66	62	60	57	52	47
2.50		100	87	91	80	83	75	94	83	86	77	79	72	76	71	71	67	64	61	56	51
3.00		104	89	95	84	88	79	97	85	90	80	84	76	80	74	75	70	68	65	60	54
4.00		109	92	102	88	95	84	102	88	96	84	90	81	85	78	81	75	72	69	64	58
5.00		111	94	105	91	100	87	104	90	99	87	95	84	88	80	84	78	75	71	67	61
10.00		117	98	114	96	111	94	110	94	107	92	104	91	94	85	92	84	82	77	73	67

