


東芝照明器具配光データシート

名称	LED照明器具
形名	LEKR727301ZWW-LD9

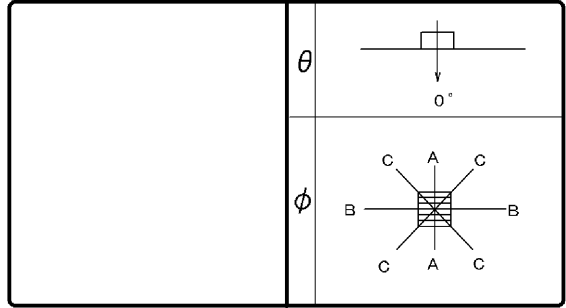

効 率	F ◡	0 %
	F ◡	100 %
	F ○	100 %
	器具 光束	2650 lm

保守 率	良	0.81
	中	0.77
	否	0.68

前面	プリズム
反射面	塗装 (白)

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	440	440	440
10°	417	417	417
20°	363	363	363
30°	313	313	313
40°	262	262	262
50°	205	205	205
60°	143	143	143
70°	80	80	80
80°	26	26	26
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射 率 (%)	天井	80						70						50						30						20						0									
	壁	70		50		30		70		50		30		50		30		30		30		10		0		70		50		30		50		30		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	固有照明率 (×0.01)																																								
0.60	65	60	51	49	43	42	63	59	51	48	43	42	49	47	42	41	41	41	36	35																					
0.80	78	70	64	60	55	53	75	69	63	59	55	53	61	58	53	52	52	51	47	45																					
1.00	85	76	71	66	62	59	82	75	70	65	62	59	67	64	60	58	59	57	53	51																					
1.25	92	82	80	73	71	66	89	80	78	72	70	66	75	70	68	65	66	64	60	58																					
1.50	97	86	85	77	77	71	94	84	83	76	75	71	80	75	73	69	71	68	64	62																					
2.00	105	91	95	85	87	79	102	90	92	84	85	79	88	82	82	77	79	76	72	70																					
2.50	110	95	101	89	93	84	106	93	98	88	91	83	93	86	87	82	84	81	77	75																					
3.00	113	97	105	92	98	88	109	95	102	91	96	87	97	89	92	85	88	84	81	79																					
4.00	117	100	111	96	105	93	113	98	108	95	103	92	101	93	97	90	93	88	86	84																					
5.00	120	102	115	98	110	95	116	100	111	97	107	95	104	95	101	93	96	91	89	87																					
10.00	126	105	123	103	120	102	121	104	118	102	116	101	111	100	99	103	97	95	93	93																					

