


東芝照明器具配光データシート

名称	LED照明器具
形名	LEKR745851UN-LD9

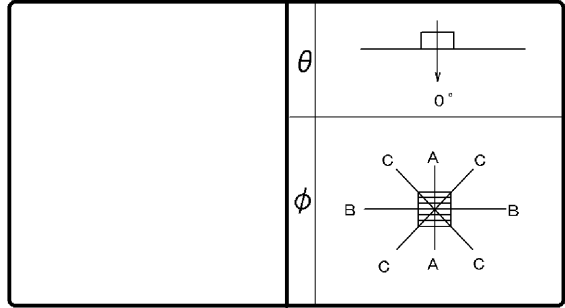

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	4800 lm

保守 率	良	0.81
	中	0.77
	否	0.68

前面	カバー (乳白)
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	384	384	384
10°	377	377	377
20°	352	352	352
30°	314	314	314
40°	266	266	266
50°	208	208	208
60°	147	147	147
70°	84	84	84
80°	26	26	26
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射 率 (%)	天井	80						70						50						30						20						0									
	壁	70		50		30		70		50		30		50		30		30		30		10		0		70		50		30		50		30		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	固有照明率 (×0.01)																																								
0.60	64	59	50	48	42	41	63	58	50	47	42	40	48	46	41	40	40	39	35	33																					
0.80	77	70	63	59	54	52	75	68	62	58	53	51	60	57	52	51	51	50	46	44																					
1.00	84	75	71	65	61	58	81	74	69	65	61	58	67	63	59	57	58	56	52	50																					
1.25	92	81	79	72	70	65	89	80	77	71	69	65	74	70	67	64	65	63	59	57																					
1.50	97	85	85	77	76	70	94	84	83	76	75	70	79	74	72	69	70	68	64	62																					
2.00	105	91	95	84	86	79	101	90	92	83	85	78	88	81	82	77	79	76	72	70																					
2.50	109	94	100	89	93	84	106	93	98	88	91	83	92	85	87	82	84	80	77	75																					
3.00	113	97	105	92	98	87	109	95	102	91	96	87	96	89	91	85	87	84	80	78																					
4.00	117	100	111	96	105	92	113	98	107	95	102	92	101	93	97	90	93	88	85	83																					
5.00	120	101	114	98	110	95	116	100	111	97	106	94	104	95	101	93	96	91	88	86																					
10.00	126	105	123	103	120	102	121	104	118	102	116	101	111	100	99	102	97	95	93																						

