


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDL20T・D/9/ 12-S
光束	1200 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

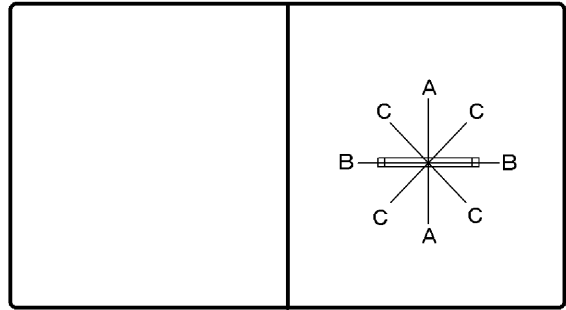

効率	F	%
	F	%
	F	100 %
	器具光束	1200 lm

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考
初期特性データです。
ランプ単体での配光データです。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	242	242	242
10°	239	236	238
20°	231	221	226
30°	217	196	208
40°	200	166	184
50°	179	131	157
60°	156	93	129
70°	133	55	102
80°	111	20	79
90°	90	0	60
100°	72	0	44
110°	56	1	33
120°	43	2	25
130°	32	2	19
140°	23	3	14
150°	16	3	11
160°	11	4	8
170°	8	3	6
180°	2	4	4

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		30		10		0														
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	照明率 (×0.01)																																															
0.60	57	52	42	40	34	33	54	50	41	39	33	32	38	37	31	30	29	29	24	22																												
0.80	68	62	53	50	44	42	65	59	51	48	43	41	48	45	40	39	38	37	32	29																												
1.00	75	67	60	56	51	48	71	65	58	54	49	47	54	51	46	44	43	42	37	34																												
1.25	82	73	68	63	58	55	78	70	66	61	56	53	60	57	53	50	49	48	42	39																												
1.50	87	77	74	67	64	59	83	74	71	65	62	58	65	61	58	55	54	52	47	43																												
2.00	95	83	84	75	74	68	90	80	80	72	71	66	73	68	66	62	61	59	54	50																												
2.50	100	86	89	79	81	73	95	83	85	77	77	71	78	72	71	67	66	63	58	54																												
3.00	104	89	94	82	86	77	98	86	90	80	82	75	81	75	76	70	70	67	62	57																												
4.00	109	92	101	87	94	82	103	89	96	84	89	80	87	79	82	75	75	71	67	62																												
5.00	112	94	105	90	98	86	105	91	99	87	94	83	90	82	86	79	78	74	70	65																												
10.00	118	99	114	96	110	94	112	96	108	93	105	91	97	88	95	86	86	81	77	72																												

