


# 東芝ランプ 配光データシート

名称	LEDランプ
形名	LDL40T・W/17 /23-S
光束	2300 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

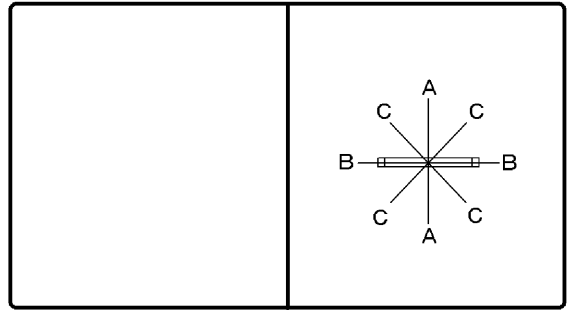

効率	F	%
	F	%
	F	100 %
	器具光束	2300 lm

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考  
初期特性データです。  
ランプ単体での配光データです。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	243	243	243
10°	240	238	239
20°	231	223	227
30°	217	199	209
40°	199	168	185
50°	177	132	158
60°	155	94	130
70°	131	56	103
80°	109	20	79
90°	88	0	59
100°	70	1	44
110°	55	2	33
120°	42	2	25
130°	31	2	19
140°	23	3	14
150°	16	3	10
160°	11	5	8
170°	8	5	7
180°	2	4	4

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	照明率 (×0.01)																							
0.60	57	52	43	40	34	33	54	50	41	39	33	32	38	37	31	30	29	29	24	22				
0.80	68	62	53	50	44	42	65	59	51	49	43	41	48	46	40	39	38	37	32	29				
1.00	75	67	61	56	51	48	71	65	58	54	49	47	54	51	46	44	43	42	37	34				
1.25	83	73	68	63	58	55	78	70	66	61	57	53	60	57	53	51	49	48	43	39				
1.50	87	77	74	67	64	60	83	74	71	65	62	58	65	61	58	55	54	52	47	43				
2.00	96	83	84	75	74	68	90	80	80	72	72	66	73	68	66	62	61	59	54	50				
2.50	100	87	90	79	81	73	95	83	85	77	78	71	78	72	72	67	66	63	58	54				
3.00	104	89	94	83	86	77	98	86	90	80	83	75	82	75	76	71	70	67	62	57				
4.00	109	93	101	87	94	82	103	89	96	84	90	80	87	79	82	76	75	71	67	62				
5.00	112	95	105	90	99	86	106	91	100	87	94	83	90	82	86	79	78	74	70	65				
10.00	118	99	114	96	110	94	112	96	108	94	105	91	97	88	95	86	86	81	77	73				

