

東芝照明器具配光データシート


名称	LED照明器具
形名	LEDC-42001F (W)

光源	名称	LEDランプ
	形名	LDR12L-W/15 OW
	光束	1000 lm × 1

前面	下面開放
反射面	

保守率	良	0.67
	中	0.63
	否	0.56

効率	F	0%
	F	98%
	F	98%
	器具光束	980 lm

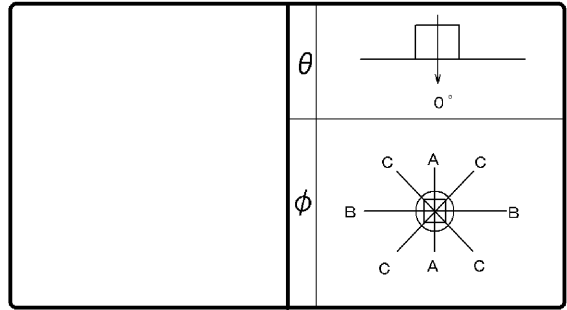

最大取付間隔	
A-A	0.5 H
B-B	0.5 H

備考	E26
----	-----

0°	2787	25°	
1°		30°	311
2°		35°	
3°		40°	96
4°		45°	
5°		50°	16
6°		55°	
7°		60°	6
8°		65°	
9°		70°	3
10°	2035	75°	
11°		80°	1
12°		85°	
13°		90°	0
14°			
15°			
16°			
17°			
18°			
19°			
20°	706		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30	70	50	30	50	30	50	30	30	30	10	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	照明率 (×0.01)																			
0.60	98	90	91	87	87	84	97	90	91	86	87	84	89	86	86	84	85	83	82	81
0.80	107	97	101	95	97	93	106	97	100	94	96	93	98	94	95	92	94	92	91	90
1.00	109	98	102	95	98	93	107	97	101	94	97	92	99	94	95	92	94	91	90	89
1.25	111	98	104	95	99	93	108	97	102	95	98	93	100	94	96	92	94	91	90	89
1.50	113	99	106	96	102	94	110	98	104	96	100	94	101	95	98	93	95	92	91	90
2.00	116	101	110	98	105	96	113	100	107	97	103	95	103	96	100	94	97	93	92	91
2.50	118	101	112	99	108	97	114	100	110	99	106	97	105	97	102	96	98	94	93	92
3.00	119	102	115	100	111	99	116	101	112	100	108	98	106	98	104	97	100	95	94	92
4.00	122	104	118	102	115	101	118	103	115	101	112	100	109	100	107	99	102	97	96	94
5.00	123	104	120	103	118	103	119	103	117	102	115	102	110	101	109	100	104	98	97	96
10.00	127	106	126	106	125	106	123	105	122	105	121	105	114	103	114	103	107	101	100	99

