

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR426523N-LD9+F-42123

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	4000 lm

保 守 率	良	0.81
	中	0.77
	否	0.72

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

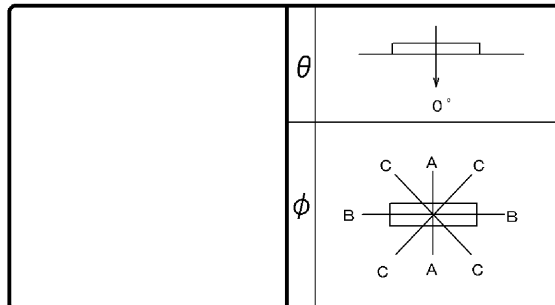

備考

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁		70		50		30		70		50		30		50		30		30		10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
0°	355	355	355		固有照明率 (×0.01)																							
10°	349	347	349	室指数																								
20°	328	329	327	0.60	63	58	49	46	40	39	61	56	48	46	40	38	46	44	39	38	38	37	33	31				
30°	295	298	294	0.80	75	68	61	57	52	49	73	67	60	56	51	49	58	55	50	48	49	48	43	41				
40°	252	255	252	1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	61	57	55	55	54	49	47				
50°	202	206	203	1.25	90	80	77	70	67	63	87	78	75	69	66	62	72	67	64	61	62	61	56	54				
60°	149	152	151	1.50	95	84	82	75	73	68	92	82	80	74	72	67	77	72	70	66	67	65	61	59				
70°	95	98	96	2.00	103	90	92	83	84	77	100	88	90	81	82	76	85	79	79	75	76	73	69	67				
80°	43	45	44	2.50	108	93	98	87	90	82	104	91	96	86	88	81	90	84	85	79	81	78	74	72				
90°	1	1	1	3.00	111	96	103	90	96	85	107	94	100	89	93	85	94	87	89	83	85	82	78	76				
100°	0	0	0	4.00	116	99	109	94	103	91	112	97	106	93	100	90	100	91	95	88	91	86	83	81				
110°	0	0	0	5.00	119	101	113	97	108	94	115	99	109	96	105	93	103	94	99	91	94	89	87	85				
120°	0	0	0	10.00	125	104	122	102	119	101	120	103	117	101	115	100	110	99	108	98	101	96	94	92				
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

