

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEDD-30033L K

光 源	名 称	
	形 名	LED
	光 束	2880 lm × 1

前 面	
反射面	

保 守 率	良	0.81
	中	0.77
	否	0.68

効 率	F 	0%
	F 	100%
	F 	100%
	器具 光束	2880 lm

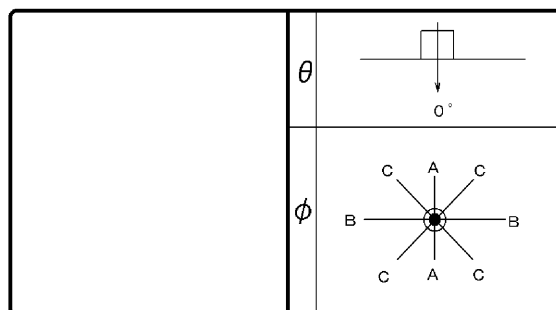

最大取付間隔	
A-A	0.5 H
B-B	0.5 H
備 考	

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30	20	0		
0°	3546	25°	341		壁	70		50		30		70		50		30		50		30		30	10	0				
1°		30°	126		床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
2°		35°	57	室指数	照 明 率 (×0.01)																							
3°		40°	40		0.60	94	87	86	81	81	78	93	86	85	81	80	78	84	81	80	78	79	77	75	75			
4°		45°	29		0.80	101	92	93	87	88	84	99	91	92	87	87	84	90	86	86	83	85	83	81	80			
5°	3335	50°	19		1.00	106	95	98	91	93	88	104	95	97	91	92	88	95	90	90	87	89	87	85	84			
6°		55°	13		1.25	109	97	101	93	96	90	107	96	100	92	95	90	97	91	93	89	91	88	86	85			
7°		60°	8		1.50	112	98	104	95	99	92	109	97	102	94	97	91	99	93	95	90	92	89	87	86			
8°		65°	4		2.00	115	100	108	97	103	94	112	99	106	96	101	94	102	95	98	92	95	91	89	88			
9°		70°	1		2.50	118	102	112	99	107	96	114	100	109	98	105	96	104	96	101	94	97	93	91	90			
10°	2603	75°	0		3.00	120	103	115	100	110	98	116	102	112	99	108	97	106	98	103	96	99	95	93	91			
11°		80°	0		4.00	123	105	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94			
12°		85°	0		5.00	125	106	122	105	119	103	121	105	118	104	116	103	112	102	110	101	105	99	98	96			
13°		90°	0		10.00	130	108	128	108	127	108	125	107	124	107	123	107	117	105	116	105	110	104	103	101			
14°																												
15°	1862																											
16°																												
17°																												
18°																												
19°																												
20°	792																											

