

東芝照明器具配光データシート


名 称	LED高天井用照明器具
形 名	LEDJ-20915NM-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	18700 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

前 面	ガラス (クリアー)
反射面	レンズ

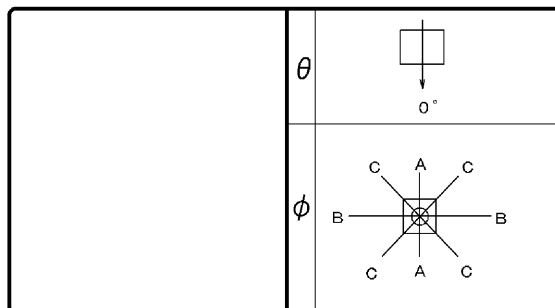

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	960		
10°	1006		
20°	842		
30°	457		
40°	157		
50°	59		
60°	34		
70°	18		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		87	80	77	74	72	69	86	79	77	73	71	69	75	73	71	69	70	69	66	65		
0.80		98	89	89	84	83	80	96	88	88	83	83	80	86	82	82	79	81	79	77	75		
1.00		102	92	93	86	87	83	100	91	92	86	86	82	89	85	85	82	83	81	79	78		
1.25		106	94	98	90	92	86	104	93	96	89	91	86	93	88	88	85	87	84	82	80		
1.50		109	96	101	92	95	89	107	95	99	91	94	88	96	90	92	87	89	86	84	83		
2.00		114	99	107	96	102	93	111	98	105	95	100	92	100	93	96	91	93	90	88	86		
2.50		117	101	111	98	105	95	113	100	108	97	103	94	103	95	99	93	96	92	90	88		
3.00		119	102	113	99	109	97	115	101	110	98	106	96	105	97	102	95	98	93	92	90		
4.00		122	104	117	102	113	100	118	102	114	101	111	99	108	99	105	97	101	96	94	92		
5.00		124	105	120	103	117	101	119	103	116	102	113	101	110	100	108	99	102	97	96	94		
10.00		127	107	126	106	124	105	123	105	121	105	120	104	114	103	113	102	106	100	99	97		

