

東芝照明器具配光データシート


名 称	LED高天井用照明器具
形 名	LEDJ-20915NW-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	19600 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	ガラス (クリアー)
反射面	レンズ

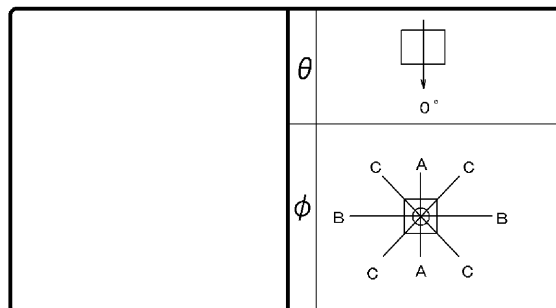

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	537		
10°	532		
20°	515		
30°	475		
40°	389		
50°	160		
60°	16		
70°	9		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		75	69	64	60	56	55	74	68	63	60	56	55	61	59	55	54	55	54	50	49		
0.80		89	81	78	73	70	67	87	79	77	72	70	67	75	71	69	67	68	66	63	61		
1.00		95	85	84	78	77	73	93	84	83	78	76	73	81	76	75	72	73	71	68	67		
1.25		102	90	92	84	85	79	99	89	90	83	84	79	87	82	82	78	80	77	74	73		
1.50		106	93	97	88	90	84	103	92	95	87	89	83	91	86	86	82	84	81	78	77		
2.00		112	98	105	93	99	90	109	97	102	93	97	89	98	91	93	88	90	87	85	83		
2.50		116	100	109	96	103	93	112	99	106	95	101	93	101	94	97	91	94	90	88	86		
3.00		118	101	112	98	107	96	114	100	109	97	105	95	104	96	100	93	96	92	90	88		
4.00		121	103	116	101	112	99	117	102	113	100	109	98	107	98	104	96	99	95	93	91		
5.00		123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	92		
10.00		127	106	124	105	122	104	122	105	120	104	118	103	112	102	111	101	105	99	97	95		

