

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEKR410523W-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	4500 lm

保 守 率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

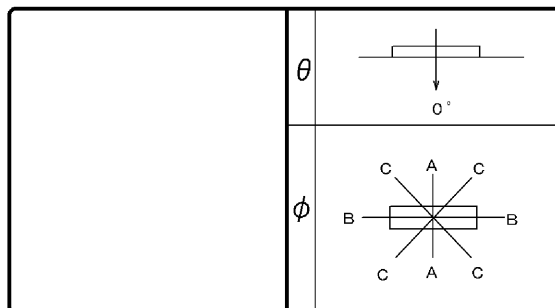

備考

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10	0			
						70		50		30		70		50		30		50		30		30	10	0				
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
				室指数	固 有 照 明 率 (×0.01)																							
0°	378	378	378	0.60	65	60	51	48	43	41	63	58	50	48	42	41	49	47	42	41	41	40	36	34				
10°	378	369	374	0.80	77	70	64	60	55	53	75	69	63	59	54	52	61	58	53	52	52	51	47	45				
20°	364	350	359	1.00	85	76	71	66	62	59	82	74	70	65	62	59	67	64	60	58	59	57	53	51				
30°	330	318	329	1.25	92	82	80	73	71	66	89	80	78	72	70	66	75	70	68	65	66	64	60	58				
40°	274	273	282	1.50	97	86	85	78	77	71	94	84	83	77	76	71	80	75	73	70	71	69	65	63				
50°	195	220	220	2.00	105	92	95	85	87	80	102	90	93	84	85	79	88	82	82	78	79	76	73	71				
60°	102	162	144	2.50	110	95	101	89	93	84	106	93	98	88	91	84	93	86	88	82	84	81	77	75				
70°	48	99	60	3.00	113	97	105	92	99	88	109	95	102	91	96	87	97	89	92	86	88	84	81	79				
80°	24	37	26	4.00	117	100	111	96	105	93	113	98	108	95	103	92	101	93	97	90	93	88	86	84				
90°	1	0	1	5.00	120	101	115	98	110	95	116	100	111	97	107	95	104	95	101	93	96	91	89	87				
100°	0	0	0	10.00	125	105	122	103	120	102	121	103	118	102	116	101	110	100	109	98	102	97	95	93				
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

