


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF8WW-H-GX 53/3
光束	740 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

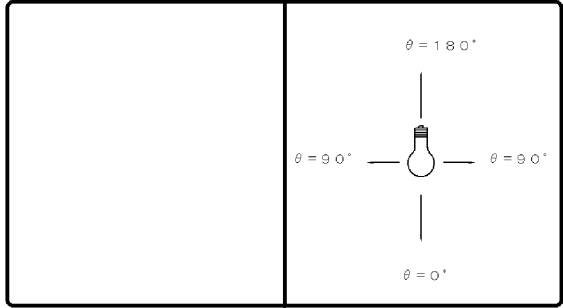

効 率	F	%
	F	%
	F	100 %
	器具 光束	740 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	355		
10°	348		
20°	325		
30°	288		
40°	241		
50°	188		
60°	135		
70°	84		
80°	40		
90°	15		
100°	12		
110°	11		
120°	9		
130°	7		
140°	5		
150°	3		
160°	1		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数		照 明 率 (×0.01)																																			
0.60		63	58	49	46	40	39	61	56	48	46	40	39	46	44	39	38	38	37	33	31																
0.80		75	68	61	57	52	50	72	66	59	56	51	49	57	54	50	48	48	47	42	40																
1.00		82	73	68	63	59	56	79	72	66	62	58	55	63	60	56	54	54	53	48	46																
1.25		89	79	76	70	67	63	86	77	74	69	66	62	70	66	63	61	61	59	54	52																
1.50		94	83	82	74	73	68	91	81	80	73	71	67	75	71	68	65	66	63	59	56																
2.00		102	89	92	82	83	76	98	87	89	80	81	75	83	78	77	73	74	71	67	64																
2.50		107	92	97	86	90	81	103	90	94	84	87	80	88	82	83	77	78	75	71	69																
3.00		110	95	102	89	95	85	106	93	98	88	92	83	92	85	87	81	82	79	75	72																
4.00		115	98	108	93	102	90	110	96	104	92	99	88	97	89	93	86	87	83	80	77																
5.00		118	99	112	96	106	93	113	97	107	94	103	91	100	91	96	88	90	86	83	80																
10.00		123	103	120	101	117	99	118	101	115	99	112	98	107	96	104	95	97	92	89	87																

